

# UAR- 30994

## Arizona Wall Light


Surface



### Physical Data

Length • 9.8"  
 Height • 34.67"  
 Weight • 29 lbs

IP55 • Suitable For Wet Locations  
 IK07 • Impact Resistant (Vandal Resistant)

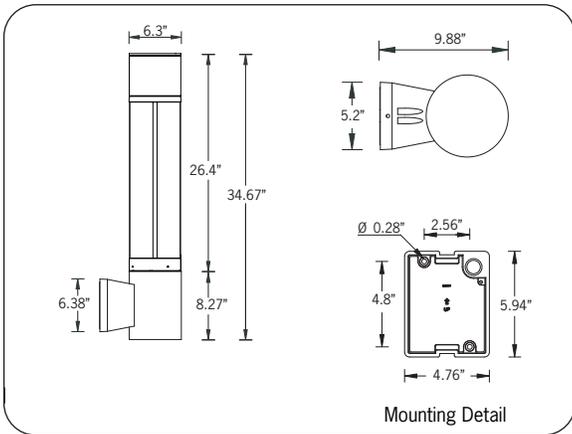

A decorative cylindrical shape wall lantern with symmetrical light distribution. Developed to compliment the Arizona light column. Low copper content die-cast aluminum housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear.

#### Aluminum Casting

**Less than 0.1% copper content – Marine Grade LM6 Aluminum** High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

#### Pre paint

**8 step degrease and phosphate process** that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

#### Memory Retentive -Silicon Gasket.

Provided with special injection molded “fit for purpose” long life high temperature **memory retentive silicon gaskets**. Maintains the gaskets exact profile and seal over years of use and compression.

#### Thermal management.

LM6 Aluminum is used for its **excellent mechanical strength and thermal dissipation properties** in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

#### Surge Suppression

**Standard 10kv surge suppressor** provided with all fixtures.

#### Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

#### Paint.

**UV Stabilized 4.9Mil thick powder coat paint** and baked at 200 Deg C.

This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

#### Hardware.

Provided Hardware is **Marine grade 316 Stainless steel**.

#### Anti Seize Screw Holes

Tapped holes are infused with a **special anti seize compound** designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

#### High Impact Acrylic Lens.

Manufactured with Ultra High Impact, Naturally UV Stabilized Injection Molded Acrylic.

#### Optics & LED

Precise optic design provides **exceptional light control and precise distribution of light**. LED CRI > 80

#### Lumen - Maintenance Life

**L80 /B10 at 50,000 hours** (This means that at least 90% of the LED still achieve 80% of their original flux)

#### Standard Options

**Lamp**  
 30w LED  
 1832 lm

**LED Color**  
 W27 • 2700K  
 W30 • 3000K  
 W40 • 4000K

**Finish Color**

01 - Black - RAL 9011	01
02 - Dark Grey - RAL 7043	02
03 - White - RAL 9003	03
04 - Metallic Silver - RAL 9006	04
05 - Matte Silver - RAL 9006	05
06 - Bronze - RAL 6014	06
07 - Custom RAL	

#### Options (Consult Factory for Pricing)

NAT • Natatorium & High Salt Environments

Ordering Example : UAR - 30994 - 30w - W30 - 02 - 120/277v - Options

UAR	30994	Lamp	LED Color	Color	Voltage	Options
		30w LED	W27   2700K W30   3000K W40   4000K	01 Black 02 Dark Grey 03 White 04 Metallic Silver 05 Matte Silver 06 Bronze 07 Custom RAL	120/277v Other (Specify)	NAT   Natatorium Rated

PROJECT:  DATE:  QUANTITY:

TYPE:  NOTE:

