



For installation of Quarter 1 wall washer.  
Model. U31321-U31328 , U31331-U31332 and U31341-U31342.

## Product drawing (dimensions)


### SUITABLE FOR WET LOCATIONS

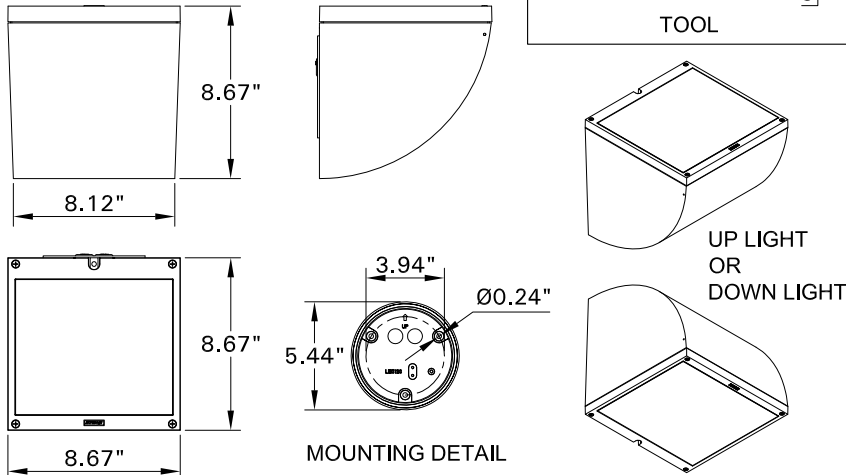


**NOTE**  
Mounts over  
a 3" Octagonal  
Junction box.



1




2




Center the Back Plate over the J Box  
and Secure the back plate to the wall




Connect Power and  
Ground Wire.

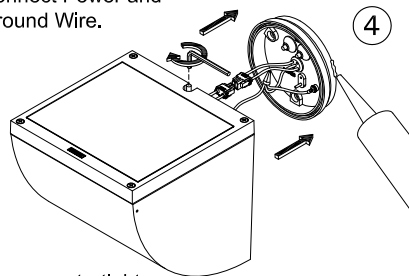

Ensure watertight  
seal using UL approved silicone based sealant.



Install the Lamp

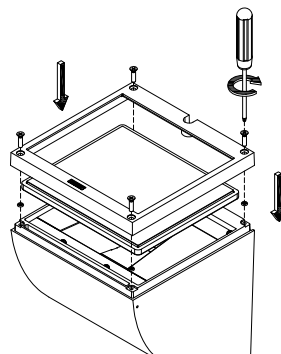

## Notice to installer :

- 1.WIRING INSTRUCTIONS** Warning : RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.
- 2.This fixture has a VOLTAGE SPECIFIC BALLAST,**Check that the supply voltage is the same as the installed ballast voltage.

**Ligman Lighting USA**

Tanasbourne Commerce Center  
3302 Nw 211th Terrace  
Hillsboro Oregon 97124  
Tel : 503-645-0500, Fax : 503-645-8100

[www.ligmanlightingusa.com](http://www.ligmanlightingusa.com)

U 31321/21/12/11/REV.0  
1/1



FM-TS-13/25-05-2007-REV.2