

INSTALLATION AND SERVICE MANUAL

LIGMAN
NORTH AMERICA







For Installation of Odessa 1, 2 Floodlights LED.
Model. UOD-50001, UOD-50011

Product drawing (dimensions)

☑ IP66 IK08 CLASS I

Ø0.3m

Max. mounting height 7m.

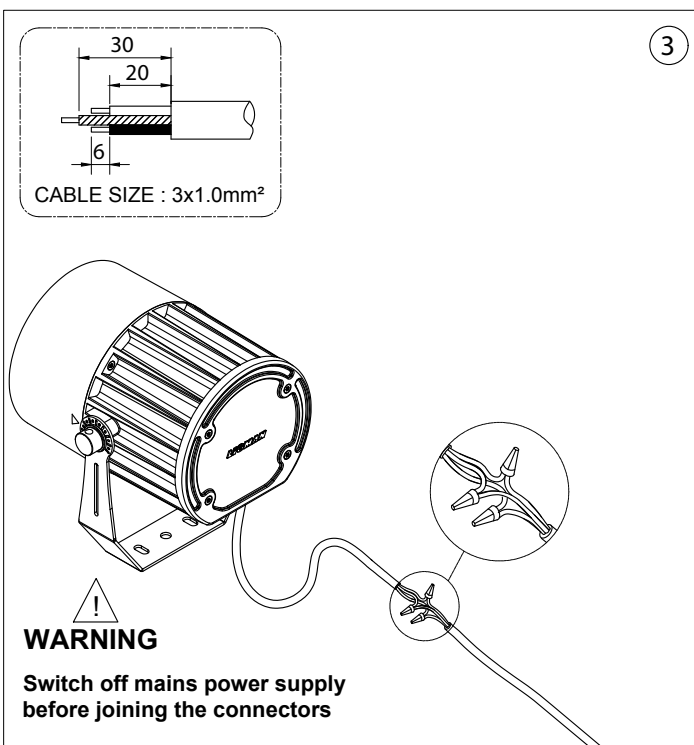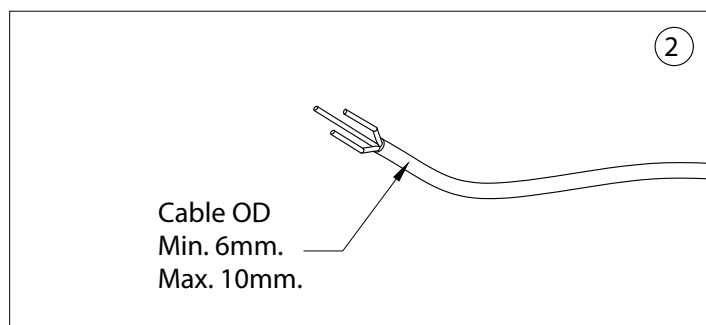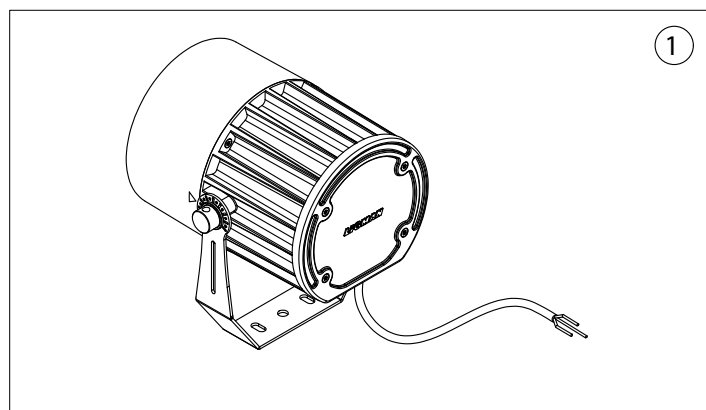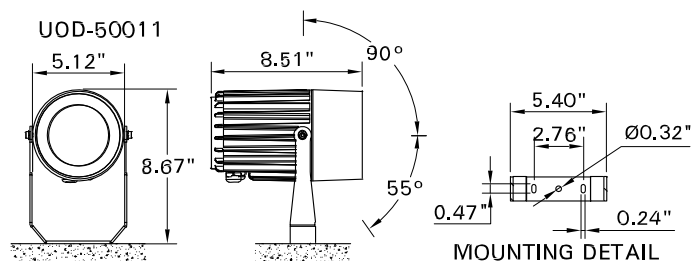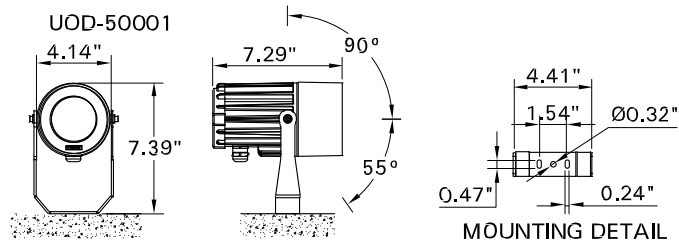

- LIGMAN standard products are supplied with the control gear
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
- LIGMAN luminaires are designed to conform IEC 60598 2-18 standard.
Technical amendments and modifications techniques reserved.

Ligman Lighting USA

7144 NE Progress Court, Hillsboro
Oregon, 97124, USA
Tel : 503 645 0500 | Fax : 503 645 8100

www.ligmanlightingusa.com

FM-TS-13-1/13-05-2563/Rev.6