



For Installation of Accessories Odessa Medium LED UOD-50011.  
Model. A80114, A80131, A80231 and A50341.

## Product drawing (dimensions)


SUITABLE FOR WET LOCATIONS



Linear spread lens  
A80114




Anti-glare attachment  
A80131



Anti-glare louvre  
A80231

Unscrew 3 Screws Holding  
Front Bezel to Fixture Housing


①

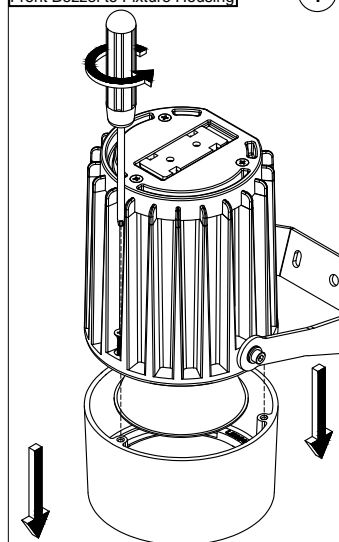

Remove Old Bezel

Replace with New Bezel  
designed for Accessories

②

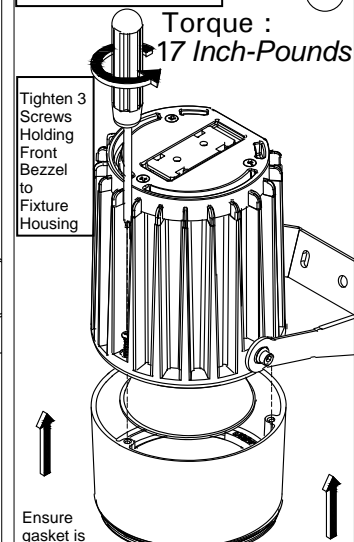

Torque :  
17 Inch-Pounds


Tighten 3  
Screws  
Holding  
Front  
Bezel  
to  
Fixture  
Housing

Ensure  
gasket is  
Properly Seated  
between bezel and Fixture Housing

Slide Accessory  
Option  
into New Front  
Bezel


Tighten the 3 Set  
Screws on  
Accessory  
Bezel

Torque :  
17 Inch-Pounds




Linear spread lens

Torque :  
17 Inch-Pounds



Anti-glare attachment


Torque :  
17 Inch-Pounds




Anti-glare louvre

③

Torque :  
17 Inch-Pounds



LIGHT DISTRIBUTION FOR  
LINEAR SPREAD LENS DETAIL

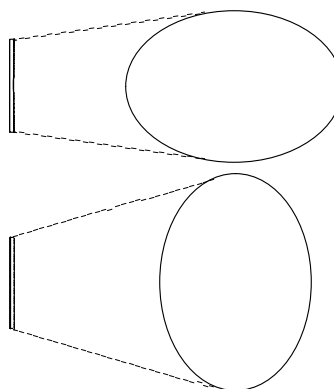

## Ligman Lighting USA

### Notice to Installer

#### Wiring Instruction ⚠ Warning:

- Risk of Fire and Electrical Shock, This fixture must be installed only by a qualified electrician, Installation must adhere to the National Electrical Code (NEC) and all applicable local and federal regulations.
- Always disconnect power before servicing the fixture.