

IP55 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

UER-20541

Euroman post top

A decorative post top lantern with excellent downward symmetrical light distribution. Developed to compliment the Euroman wall light and street lanterns using energy saving compact fluorescent lamps as well as metal halide and high pressure sodium lamps. Designed for lighting of entrances, footpaths and car parks. Low copper content die-cast aluminum housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear or opal high impact resistant UV stabilized polycarbonate diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector with the clear diffuser option.

Physical Data

Length: 23.0"

Height: 27.83"

Weight: 46.3 lbs

Lamp

☐ CFQ 26w/CFTR 32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V
☐ 277V
☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL _____
☐ 06-Bronze - RAL 6014



Top Style

☐ (1) Dome ☐ (2) Flat Top





Diffuser

☐ C - Clear ☐ O - Opal

☐ Aluminum Arm Pole Clamp (A20160) ☐ Aluminum Single Arm Post Top (A20260)

☐ Aluminum double Arm Post Top (A20360)

☐ HGT - Specify Custom Height _____ ft

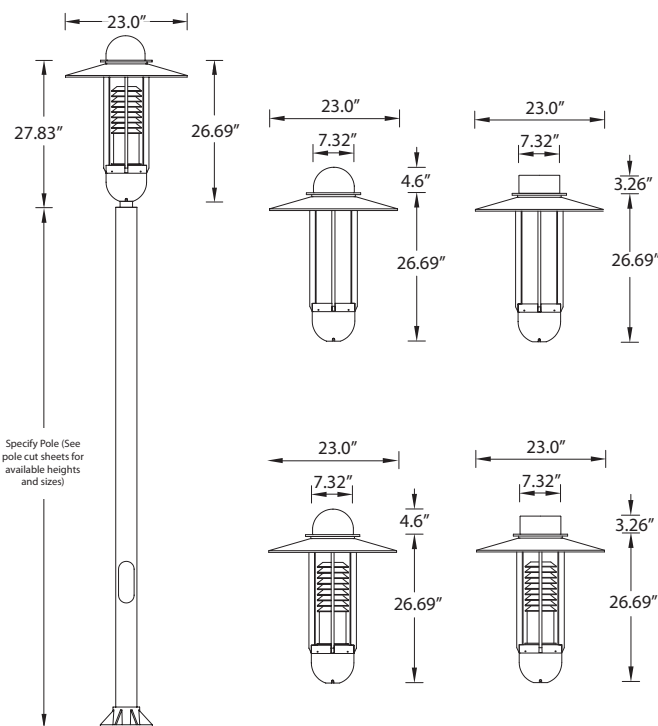

Ordering Example : UER - 20541 - CFQ-26w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice.