

IP65 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

UJE-95161

Jet pendant cylindrical

A range of cylindrical shape pendent exterior down-light luminaires utilizing various halogen lamps and beam distributions for downward lighting requirements. The luminaires are designed for all areas of interior and exterior lighting.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws and suspension kit. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance.

Physical Data

Diameter: 5.51"

Height: 6.14"

Weight: 2.6 lbs

Lamp

☐ PAR-30 HAL 75w 120v

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V

Options (Please Specify)

Color (Please Specify)

- | | |
|--|--|
| <input type="checkbox"/> 01-Black - RAL 9011 | <input type="checkbox"/> 02- Dark Grey - RAL 7043 |
| <input type="checkbox"/> 03-White - RAL 9003 | <input type="checkbox"/> 04 - Metallic Silver - RAL 9006 |
| <input type="checkbox"/> 05-Matt Silver - RAL 9006 | <input type="checkbox"/> 07- Custom - RAL _____ |
| <input type="checkbox"/> 06-Bronze - RAL 6014 | |





☐ F - Frosted Lens


☐ AC- Custom aircraft cable length _____ ft

☐ RPS- Rigid stem pendant with swivel mount for 4" square junction box mounting. Specify stem length _____ ft

☐ RPR- Rigid stem pendant with swivel mount for 4" round junction box mounting. Specify stem length _____ ft

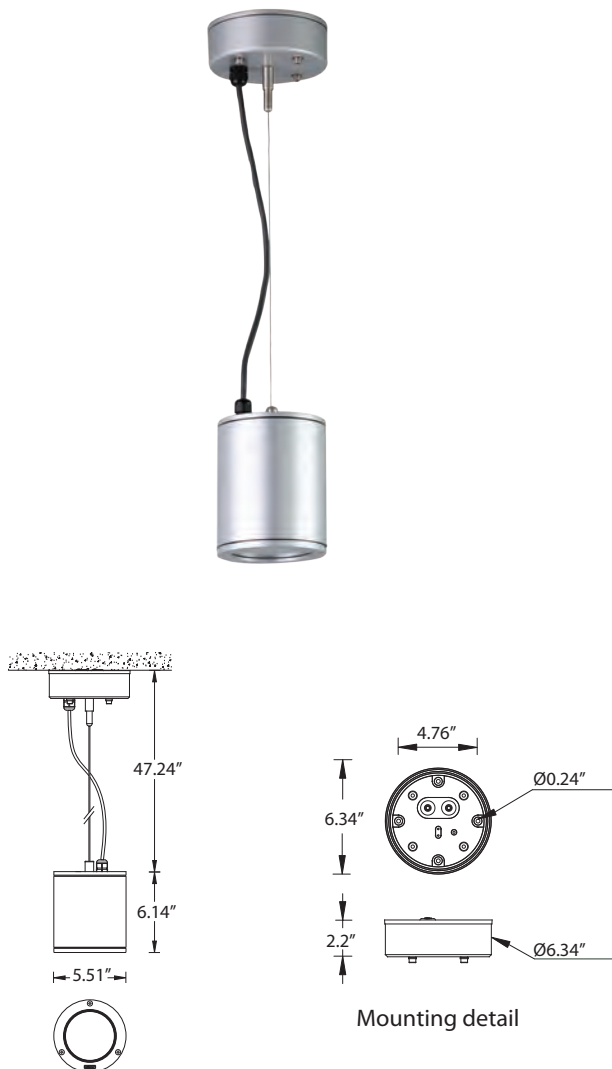

Swivel Canopy Pendant Square- A90321

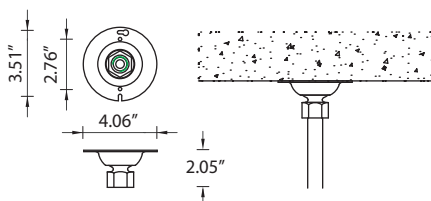

Swivel Canopy Pendant Round - A90421

Ordering Example : UJE - 95161 - PAR- 75w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.