



IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

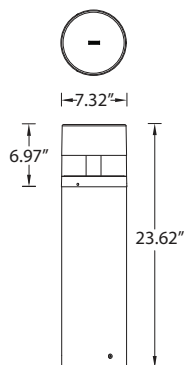

## ULH-10513

### Lightsoft cylindrical bollard

The innovative reflector technology of the Lightsoft bollard guarantees a high degree of efficiency and optimal visual comfort while fulfilling the dark sky criteria. Lightsoft has been developed to have excellent controlled downward light eliminating any glare. It has three light shield accessories with different light distributions. The Lightsoft is available in a cylindrical or square shape design with two different heights. Designed for lighting of entrances and residential areas by providing wide spread illumination on driveways, pathways and squares.

Extruded aluminum body and low copper content die-cast aluminum housing. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate lens. Single cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral ballast and anodized high purity aluminum reflector.

#### Physical Data

Length: 7.32"

Height: 23.62"

Weight: 16.5 lbs

#### Lamp

☐ T6 CMH 70w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Voltage (Please Specify)

- ☐ 120V  
☐ 277V  
☐ Other \_\_\_\_\_

#### Options (Please Specify)

##### Color (Please Specify)

- |  |  |
|--|--|
| <input type="checkbox"/> 01-Black - RAL 9011       | <input type="checkbox"/> 02- Dark Grey - RAL 7043        |
| <input type="checkbox"/> 03-White - RAL 9003       | <input type="checkbox"/> 04 - Metallic Silver - RAL 9006 |
| <input type="checkbox"/> 05-Matt Silver - RAL 9006 | <input type="checkbox"/> 07- Custom - RAL _____          |
| <input type="checkbox"/> 06-Bronze - RAL 6014      |  |



#### Light Shields



☐ asymmetrical  
180° emission



☐ asymmetrical  
90° + 90° emission




☐ asymmetrical  
180° emission + lightblade

#### Mounting Accessories



☐ Anchor Bolt Kit

☐ Specify Custom Height \_\_\_\_\_ ft



Ordering Example : ULH - 10513 - T6-CMH-70w - 120v

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.