


LUMINAIRE SPECIFICATION

Tel: 503-645-0500 7144 NW Progress Ct Fax: 503-645-8100 Hillsboro, Oregon 97124 www.ligmanlightingusa.com

IP54: Suitable for Wet Locations

IK07: Impact Resistant (Vandal Resistant)

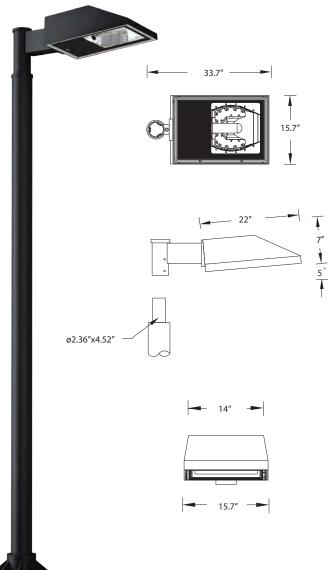

UMN-92225-SC76

Martini 5 medium single area light type II

Small and medium size modern shape area light distribution for metal halide lamps or sodium vapour discharge lamps 70-400w and LED. A high quality reflector design creates broad spread light distribution. Main application for lighting of public, private roadways, car parks, exhibition areas, service stations, truck stop and sports grounds. Aluminium housing with high corrosion resistance. Integral control gear. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass with hinge aluminium frame for in-position lamp replacement. Anodized high purity aluminium reflector. Main housing is powder paint with high corrosion resistance with chemical chromatized protection.

Physical Data

Length: 33.7" Height: 7" Weight: 38.1 lbs

Lamp

□ PMH-T15 350w •••••

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

- □ 120V
- □ 277V
- □ Other

Options (Please Specify)

Color (Please Specify)

- □ 01-Black RAL 9011
- □ 03-White RAL 9003
- □ 05-Matt Silver RAL 9006
- □ 06-Bronze RAL 6014
- 01












□ 02- Dark Grey - RAL 7043

□ 07- Custom - RAL

□ 04 - Metallic Śilver - RAL 9006

□ Frosted Lens

□ Clear Lens



☐ Straight Arm 0° Tilt (Dark Sky Compliant)





☐ Single Banner Arm

□ Double Banner Arm



Ordering Example: UMN - 92225-SC76 - PMH-350w - 120v - Options



PROJECT:

QUANTITY:

NOTE:

DATE: _

