
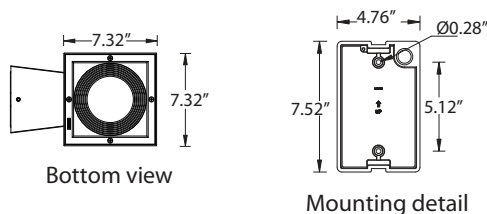


IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

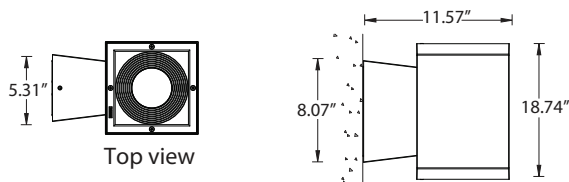

## UTA-30731

### Tango 12 square wall up-down light

Wall luminaires with a variety of reflectors and lamps with up and downward light distributions. Designed to illuminate the wall surface and for light accents on vertical surfaces.

Low copper content die-cast aluminum housing and aluminum frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Integral electronic control gear. Anodized high purity aluminum reflector.

For horizontally mounted single lamp configurations a one piece multi directional anodized high purity aluminum reflector is used for up and down light distribution. Two lamp configurations use individual reflectors for up and down light distributions. Mounting plate for 3" and 4" junction box is provided with the fixture.

#### Physical Data

Length: 11.57"

Height: 18.74"

Weight: 17.2 lbs

#### Lamp

☐ CFQ 2x26w/CFTR 2x32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Voltage (Please Specify)


☐ 120V  
☐ 277V  
☐ Other \_\_\_\_\_

#### Options (Please Specify)

☐ F - Frosted Lens  
☐ C - Clear Lens


#### Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043  
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006  
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL \_\_\_\_\_  
☐ 06-Bronze - RAL 6014



☐ SCE - Surface Conduit Entry Box - ☐ 1/2" Conduit ☐ 3/4" Conduit

☐ HGT- Specify Custom Height \_\_\_\_\_ ft



Ordering Example : UTA - 30731 - CFQ-42w - 120v - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.