

IP55 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

## UER-30962

### Euroman wall light

A decorative wall lantern with excellent downward symmetrical light distribution. Developed to compliment the Euroman post top and street lanterns. Designed for lighting of entrances, footpaths and car parks.

Low copper content die-cast aluminum housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear or opal impact resistant UV stabilized polycarbonate diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector with the clear diffuser option.

#### Physical Data

Length: 36.89"

Height: 38.74"

Weight: 31.0 lbs

#### Lamp

☐ PMH-ED17 50w 

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Voltage (Please Specify)

☐ 120V  
☐ 277V  
☐ Other \_\_\_\_\_

#### Options (Please Specify)

##### Diffuser



☐ C - Clear



☐ O - Opal

##### Top Style





☐ 1 - Dome



☐ 2 - Flat

##### Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043  
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006  
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL \_\_\_\_\_  
☐ 06-Bronze - RAL 6014

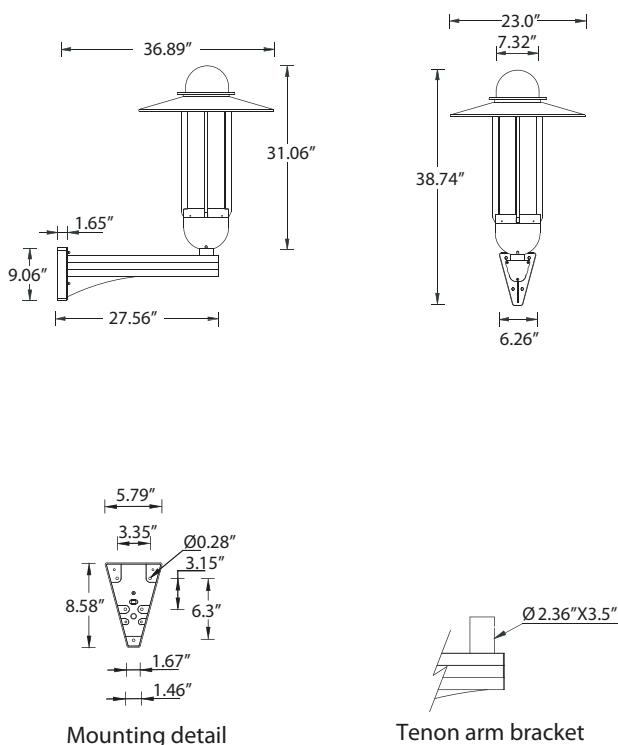

Ordering Example : UER - 30962 - PMH-50w - 120v - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.