

IP55 : Suitable for Wet Locations

IK07 : Impact Resistant (Vandal Resistant)



UDU-30132

Duomo medium shade wall light

A small and medium size shade decorative wall lantern with symmetrical light distribution. Developed to compliment the Duomo bollard and Duomo pillar light. Designed for lighting of entrances and footpaths.

Low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and opal glass diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear.

Physical Data

Length: 24.41"

Height: 16.85"

Weight: 16.7 lbs

Lamp

☐ CFQ 26w/CFTR 32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V
☐ 277V
☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL _____
☐ 06-Bronze - RAL 6014



Shade Style



☐ 1 - Swept Shade ☐ 2 - Straight Shade

Top Style

☐ 1 - Dome ☐ 2 - Cone Top



☐ DS - Dark Sky Compliant (No Rings)

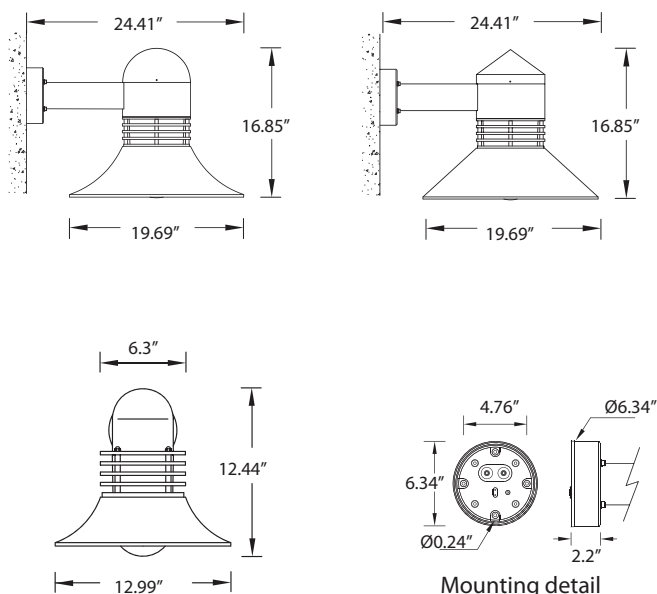

Mounting detail



Ordering Example : UDU - 30132 - CFQ-26w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.