
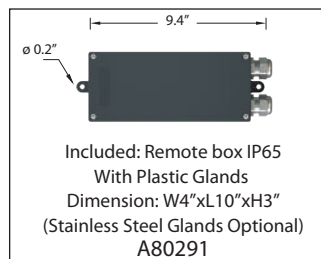
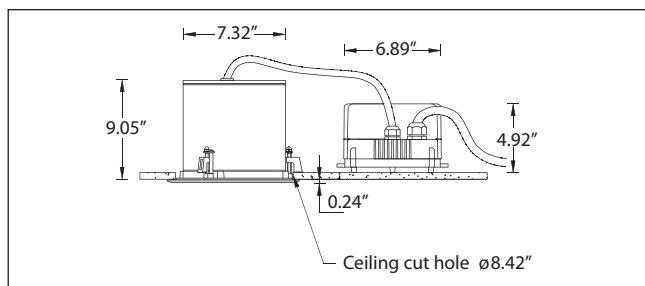


IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

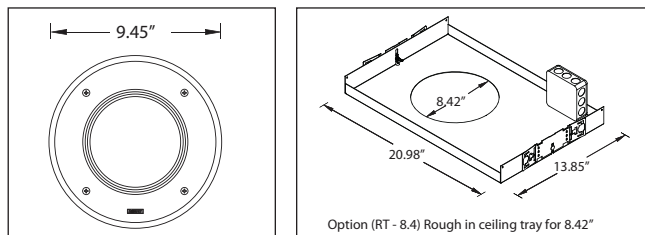

## URO-80069

### Robust 2 round recessed exterior downlight

A robust 1 and 2 exterior downlight using a variety of different lamp options. These include compact fluorescent lamps, mains halogen and discharge lamps. A selection of round front frames make this luminaire an attractive option for most design applications. Robust 2 offers choices of stainless steel or powder coat painted aluminum front frame. Easy to install and relamp. This luminaire is suited for interior and exterior lighting. The Robust 1 and 2 are ball proof and suitable for sports facilities.

Low copper content die-cast aluminum housing with a chemical chromated zinc protection before powder coating, ensuring high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Power is provided to the luminaire through a watertight cable gland and 4ft of Outdoor Submersible #18/3 SOOW 600V power cable.

Remote control gear box is included for the luminaires using lamp sources from 70w. to 150w.

#### Physical Data

Diameter: 9.45"

Weight: 14.5 lbs

#### Lamp

☐ T6 CMH 100w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Beam Angle (Please Specify)

- ☐ VN - Very Narrow Beam: 10 Deg
- ☐ N - Narrow Beam: 12 Deg
- ☐ M - Medium Beam: 30 Deg
- ☐ W - Wide Beam: 40 Deg
- ☐ VW - Very Wide Beam: 64 Deg

#### Voltage (Please Specify)

- ☐ 120V
- ☐ 277V
- ☐ Other \_\_\_\_\_

#### Options (Please Specify)

##### Front Ring Style

- ☐ Stainless Steel
- ☐ Aluminum


##### Color (Please Specify For Aluminum Front Ring Only)

- ☐ 01-Black - RAL 9011
- ☐ 02- Dark Grey - RAL 7043
- ☐ 03-White - RAL 9003
- ☐ 04 - Metallic Silver - RAL 9006
- ☐ 05-Matt Silver - RAL 9006
- ☐ 07- Custom - RAL \_\_\_\_\_
- ☐ 06-Bronze - RAL 6014



#### Lens

- ☐ F - Frosted Lens
- ☐ C - Clear Lens
- ☐ Rough in Ceiling Tray
- ☐ Concrete Pour Box



Ordering Example : URO - 80069 - T6-100w - N - 120v - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.