

IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)



## URO-80168

### Robust 3 round recessed exterior downlight

Robust 3 is an exterior downlight using a variety of different lamp options. These include compact fluorescent lamps, mains halogen and discharge lamps with square front frames. Easy to install and relamp. This luminaire is suited for interior and exterior lighting. The Robust 3 is ball proof and suitable for sports facilities. Low copper content die-cast aluminum housing with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Power is provided to the luminaire through a watertight cable gland and 4ft of Outdoor Submersible #18/3 SOOW 600V power cable.

#### Physical Data

Trim: 9.45"

Weight: 12.1 lbs

#### Lamp

☐ T6 CMH 70w 

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Beam Angle (Please Specify)

- ☐ VN - Very Narrow Beam: 6 Deg
- ☐ N - Narrow Beam: 12 Deg
- ☐ M - Medium Beam: 26 Deg
- ☐ W - Wide Beam: 35 Deg
- ☐ VW - Very Wide Beam: 60 Deg

#### Voltage (Please Specify)

- ☐ 120V
- ☐ 277V
- ☐ Other \_\_\_\_\_

#### Options (Please Specify)

##### Front Ring Style

- ☐ Aluminum






##### Color (Please Specify)

- ☐ 01-Black - RAL 9011
- ☐ 02- Dark Grey - RAL 7043
- ☐ 03-White - RAL 9003
- ☐ 04 - Metallic Silver - RAL 9006
- ☐ 05-Matt Silver - RAL 9006
- ☐ 07- Custom - RAL \_\_\_\_\_
- ☐ 06-Bronze - RAL 6014



#### Lens

- ☐ F - Frosted Lens
- ☐ C - Clear Lens
- ☐ Rough in Ceiling Tray
- ☐ Concrete Pour Box

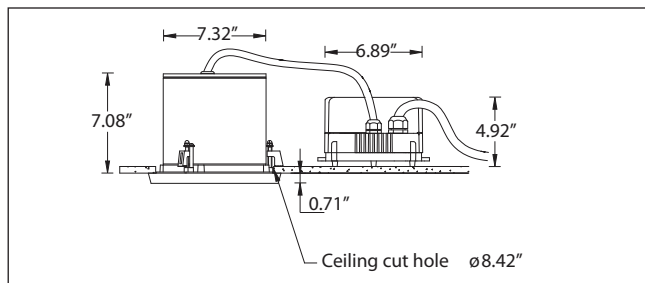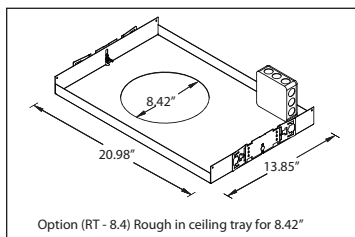

Ordering Example : URO - 80168 - T6-70w - N - 120v - Options



Rev: 11/13

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.

