

IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)



## UTA-80141

### Tango 15 square surface exterior downlight

A range of cylindrical surface mounted exterior downlight luminaires. Developed for interior and exterior lighting using a variety of different lamp options. These include compact fluorescent lamps, and discharge lamps.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chroma-tized protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

#### Physical Data

Length: 6.3"

Height: 10.43"

Weight: 4.8 lbs

#### Lamp

☐ CFQ 18w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

#### Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other \_\_\_\_\_

#### Color (Please Specify)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04 - Metallic Silver - RAL 9006


☐ 07- Custom - RAL \_\_\_\_\_



#### Lens

☐ F - Frosted Lens

☐ C - Clear Lens






☐ SCE - Surface Conduit Entry Box - ☐ 1/2" Conduit ☐ 3/4" Conduit

☐ Mounting Ring

☐ EMG - Emergency Ballast (Cylinder Height Increases to 21" Tall)

☐ HGT - Specify Custom Height \_\_\_\_\_ft

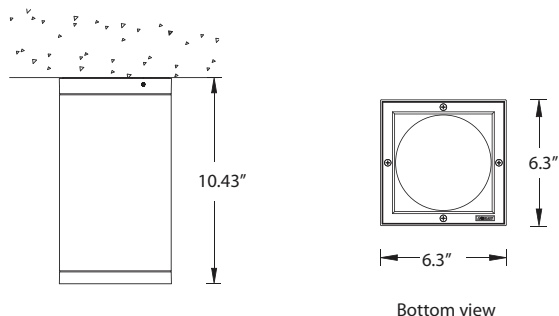

Mounting detail

Ordering Example : UTA - 80141 - CFQ-18w - 120v - Options



Rev: 11/13

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.

