


IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

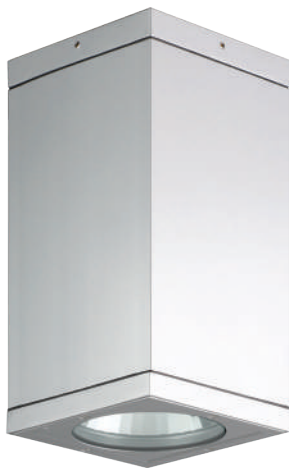

UTA-80158

Tango 16 square surface exterior downlight

A range of cylindrical surface mounted exterior downlight luminaires. Developed for interior and exterior lighting using a variety of different lamp options. These include compact fluorescent lamps, and discharge lamps.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chroma-tized protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

Physical Data

Length: 6.3"

Height: 13.42"

Weight: 15.4 lbs

Lamp

☐ T6 CMH 150w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Beam Angle (Please Specify)

- ☐ VN - Very Narrow Beam: 10 Deg
- ☐ N - Narrow Beam: 12 Deg
- ☐ M - Medium Beam: 30 Deg
- ☐ W - Wide Beam: 40 Deg
- ☐ VW - Very Wide Beam: 64 Deg

Voltage (Please Specify)

- ☐ 120V
- ☐ 277V
- ☐ Other _____


Color (Please Specify)

- ☐ 01-Black - RAL 9011
- ☐ 02- Dark Grey - RAL 7043
- ☐ 03-White - RAL 9003
- ☐ 04 - Metallic Silver - RAL 9006
- ☐ 05-Matt Silver - RAL 9006
- ☐ 07- Custom - RAL _____
- ☐ 06-Bronze - RAL 6014



Lens






- ☐ F - Frosted Lens
- ☐ C - Clear Lens



☐ SCE - Surface Conduit Entry Box - ☐ 1/2" Conduit ☐ 3/4" Conduit

☐ Mounting Ring

☐ HGT - Specify Custom Height _____ft



Mounting detail

Ordering Example : UTA - 80158 - T6-150w - N - 120v - Options



Rev: 11/13

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.

