



# ULD-30031

## Lador 8 Surface



40w LED 3568 Lumens  
IP66 • Suitable For Wet Locations  
IK08 • Impact Resistant (Vandal Resistant)  
Weight 6.1 lbs

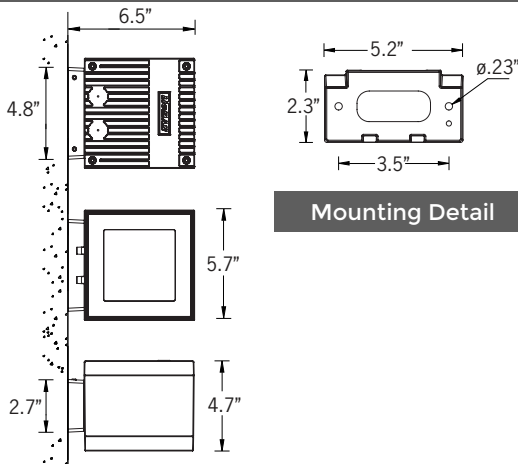

Mounting Detail

### Construction

#### Aluminum

Less than 0.1% copper content - Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

#### Pre paint

8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

#### Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

#### Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

#### Surge Suppression

Standard 10kv surge suppressor provided with all fixtures.

#### BUG Rating

B3 - U1 - G0

#### Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

#### Paint

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

#### Inspired by Nature Finishes

The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost indistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching.

#### The Coating Process

After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal decoration.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains.

Wood grain coating can create beautiful wood-looking products of any sort. There are over 300 combinations of designs currently in use. Wood grains can be made with different colors, designs, etc.

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

#### Added Benefits

- Resistance to salt-acid room, accelerated aging
- Boiling water, lime and condensed water resistant
- Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch
- Super durable (UV resistant)
- TGIC free (non-toxic)

#### Hardware

Provided Hardware is Marine grade 316 Stainless steel.

#### Anti Seize Screw Holes

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

#### Crystal Clear Low Iron Glass Lens

Provided with tempered, impact resistant crystal clear low iron glass ensuring no green glass tinge.

#### Optics & LED

Precise optic design provides exceptional light control and precise distribution of light. LED CRI > 80

#### Lumen - Maintenance Life

L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

### Square surface wall-mounted architectural range. Four sizes of square artistic precision with wide range of beam distributions.

A range of square outdoor IP66 wall sconce that meets both aesthetic and functional applications. This cubic wall sconce range is available with 4 different sizes, starting with a small 2.4" square profile at 3w, and increases proportionately to 3" at 11w, 4.5" at 21w and 5.5" square at 40w. This glare free luminaire is available in Narrow beam, Medium, Wide, Very Wide and Elliptical beam patterns.

This luminaire is engineered to meet harsh outdoor environments, as well as being able to be used as a decorative indoor product.


The Lador is provided with an integral driver and has accessories that include; dichroic color filters, linear spread lens, honeycomb louvers and anti-glare visors.

The Lador product family consists of; floodlights, wall sconces, ceiling mounted squares and cluster column event poles.

This luminaire is available with a natatorium rated coating.


To meet International Dark Sky criteria, 3000k or warmer LEDs must be selected and luminaire fix mounted (+/- 15° allowable to permit leveling).

### Additional Options (Consult Factory For Pricing)

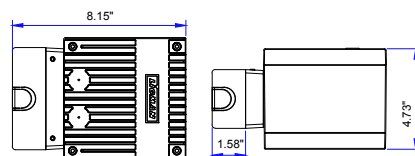

### SCDT Surface Conduit Decorative Trim

### CITY OF FLAGSTAFF & TURTLE FRIENDLY COMPLIANT

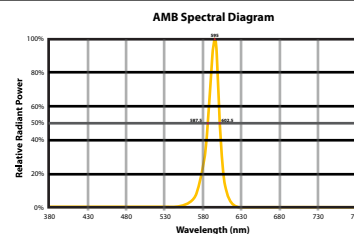

#### Narrow-Spectrum Amber LEDs

Peak wavelength between 585 & 595 nanometers and a full width of 50% power no greater than 15 nanometers.

|          |  |      |  |      |      |  |
|----------|--|------|--|------|------|--|
| PROJECT  |  |      |  |      | DATE |  |
| QUANTITY |  | TYPE |  | NOTE |      |  |

ORDERING EXAMPLE || ULD - 30031 - 40w - M - W30 - 02 - 120/277v - Options

|  |  |  |   |                             |  |
|--|--|--|---|-----------------------------|--|
| ULD-30031  |  |  |   |                             |  |
| LAMP   | BEAM   | LED COLOR  | FINISH COLOR  | VOLTAGE                     |  |
| 40w LED<br>3568 Lumens   | N - Narrow 10°<br>M - Medium 18°<br>W - Wide 30°<br>VW - Very Wide 70°<br>E - Elliptical 12° x 41° | W27 - 2700K<br>W30 - 3000K<br>W35 - 3500K<br>W40 - 4000K | 01 - BLACK RAL 9011<br>02 - DARK GREY RAL 7043<br>03 - WHITE RAL 9003<br>04 - METALLIC SILVER RAL 9006<br>05 - MATTE SILVER RAL 9006<br>06 - LIGMAN BRONZE<br>07 - CUSTOM RAL | 120/277v<br>Other - Specify |  |
| <div>INSPIRED BY NATURE FINISHES</div> <div>SW01 - OAK FINISH<br/>SW02 - WALNUT FINISH<br/>SW03- PINE FINISH<br/>DF - DOUGLAS FIR FINISH<br/>CW - CHERRY WOOD FINISH<br/>NW - NATIONAL WALNUT FINISH<br/>SU01 - CONCRETE FINISH<br/>SU02 - SOFTSCAPE FINISH<br/>SU03 - STONE FINISH<br/>SU04 - CORTEN FINISH</div> <div>THERE IS AN ADDITIONAL COST FOR THESE FINISHES</div> |  |  |   |                             |  |

|                    |  |  |
|--------------------|--|--|
|                    |  |  |
| ADDITIONAL OPTIONS |  |  |

- NAT - Natatorium Rated

F - Frosted Lens

HCL - Honeycomb Louvre

LSL - Linear Spread Lens

SCDT - Surface Conduit Decorative Trim

AMB - Turtle Friendly Amber LED

DIM - 0-10v Dimming
- COLOR DICHROIC FILTERS

RD - Red Lens

BL - Blue Lens

AM - Amber Lens


































GR - Green Lens

More Custom Finishes Available Upon Request

Consult factory for pricing and lead times



# Lador Product Family

|   |  |   |  |   |
|---|--|---|--|---|
| <br><br><b>Lador 1</b> <ul style="list-style-type: none"><li>• ULD-50001-3w-222lm</li><li>• ULD-50002-6w RGBW-253lm</li></ul>            | <br><br><b>Lador 2</b> <ul style="list-style-type: none"><li>• ULD-50011-11w-904lm</li><li>• ULD-50012-13w RGBW-568lm</li></ul>          | <br><br><b>Lador 3</b> <ul style="list-style-type: none"><li>• ULD-50021-21w-1975lm</li><li>• ULD-50022-18w RGBW-1016lm</li></ul>   | <br><br><b>Lador 4</b> <ul style="list-style-type: none"><li>• ULD-50031-39w-3568lm</li><li>• ULD-50032-36w RGBW-1929lm</li></ul> | <br><br><b>Lador 5/50</b> <ul style="list-style-type: none"><li>• ULD-30001-3w-222lm</li><li>• ULD-30041-4w RGBW-170lm</li></ul>    |
| <br><br><b>Lador 6/51</b> <ul style="list-style-type: none"><li>• ULD-30011-11w-904lm</li><li>• ULD-30051-10w RGBW-520lm</li></ul>       | <br><br><b>Lador 7/52</b> <ul style="list-style-type: none"><li>• ULD-30021-11w-1975lm</li><li>• ULD-30061-22w RGBW-1133lm</li></ul>     | <br><br><b>Lador 8/53</b> <ul style="list-style-type: none"><li>• ULD-30031-39w-3568lm</li><li>• ULD-30071-28w RGBW-1600lm</li></ul>  | <br><br><b>Lador 9/32</b> <ul style="list-style-type: none"><li>• ULD-80001-3w-222lm</li><li>• ULD-80041-4w RGBW-170lm</li></ul>  | <br><br><b>Lador 10/33</b> <ul style="list-style-type: none"><li>• ULD-80011-11w-904lm</li><li>• ULD-80051-10w RGBW-520lm</li></ul> |
| <br><br><b>Lador 11/34</b> <ul style="list-style-type: none"><li>• ULD-80021-21w-1975lm</li><li>• ULD-80061-22w RGBW-1133lm</li></ul> | <br><br><b>Lador 12/35</b> <ul style="list-style-type: none"><li>• ULD-80031-39w-3568lm</li><li>• ULD-80071-28w RGBW-1600lm</li></ul> | <br><b>Lador 13/14/15</b> <ul style="list-style-type: none"><li>• ULD-20011-4x21w-4x1975lm [13°]</li><li>• ULD-20021-4x39w-4x3568lm [13°]</li><li>• ULD-20012-4x21w-4x1975lm [19.6°]</li><li>• ULD-20022-4x39w-4x3568lm [19.6°]</li><li>• ULD-20011-4x21w-4x1975lm [26.2°]</li><li>• ULD-20011-4x39w-4x3568lm [26.2°]</li></ul> | <br><b>Lador 1 TKM</b> <ul style="list-style-type: none"><li>• ULD-50041-3w-222lm</li></ul>  | <br><b>Lador 2 TKM</b> <ul style="list-style-type: none"><li>• ULD-50051-11w-904lm</li></ul>  |
| <br><b>Lador 3 TKM</b> <ul style="list-style-type: none"><li>• ULD-50061-21w-1975lm</li></ul>  | <br><b>Lador 4 TKM</b> <ul style="list-style-type: none"><li>• ULD-50071-39w-3568lm</li></ul>   | <br><b>Lador 20</b> <ul style="list-style-type: none"><li>• ULD-50081-3w-222lm</li></ul>   | <br><b>Lador 21</b> <ul style="list-style-type: none"><li>• ULD-50091-11w-904lm</li></ul>   | <br><b>Lador 22</b> <ul style="list-style-type: none"><li>• ULD-50101-21w-1975lm</li></ul>   |
| <br><b>Lador 23</b> <ul style="list-style-type: none"><li>• ULD-50111-39w-3568lm</li></ul>  |  |   |  |   |