

IP55 : Suitable for Wet Locations
IK08 : Impact Resistant (Vandal Resistant)

URM-10056

Romeo bollard

A distinct style of bollards with a symmetrical light distribution using energy saving compact fluorescent lamps as well as metal halide and high pressure sodium lamps. Designed for lighting of entrances, footpaths, squares and gardens. Extruded aluminum column. Die-cast aluminum housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket. Opal glass diffuser. Powder paint with high corrosion resistance with chemical chromated protection. Integral control gear.

Physical Data

Length: 16.22"

Height: 31.85"

Weight: 22.2 lbs

Lamp

☐ HPS-ED17 70w 

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V
☐ 277V
☐ Other _____


Options (Please Specify)

Color (Please Specify)




☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL _____
☐ 06-Bronze - RAL 6014



Mounting Accessories



☐ Anchor Bolt Kit
☐ Specify Custom Height _____ ft

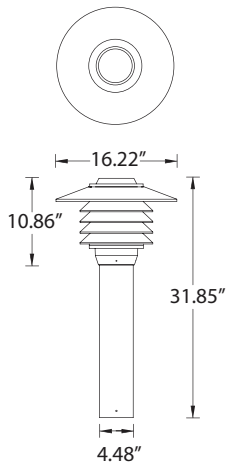

Mounting detail

Ordering Example : URM - 10056 - HPS - 70w - 120v - Options



Rev: 11/13

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.

