

IP55 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

UCO-70092

Columbus pillar light

A decorative bollard with a symmetrical light distribution with options of energy saving compact fluorescent, metal halide and high pressure sodium lamps. Developed to compliment the Columbus range of pillar light, post top and wall light luminaires. Designed for various applications including entrances, gardens, precincts and pathways.

Extruded aluminum column and low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear Anodized high purity aluminum reflector.

Physical Data

Length: 8.54"

Height: 17.79"

Weight: 25.5 lbs

Lamp

☐ CFQ 26w. CFTR 32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04 - Metallic Silver - RAL 9006

☐ 07- Custom - RAL _____



Top Style



☐ 1 - Dome



☐ 2 - Flat

Mounting Accessories



☐ Anchor Bolt Kit

☐ Specify Custom Height _____ ft




Light Shields



☐ asymmetrical
180° emission



☐ asymmetrical
90° emission

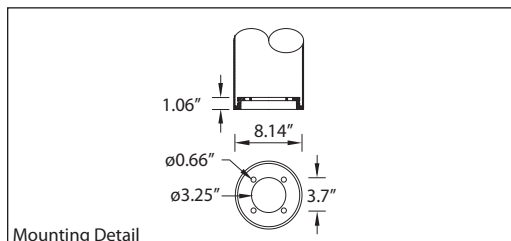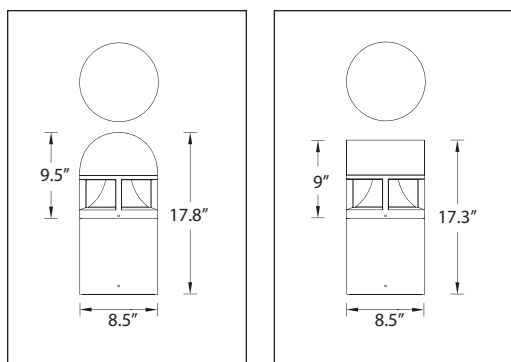

Mounting Detail



Ordering Example : UCO - 70092 - CFQ - 26w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.