

IP55 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)



UDU-10185

Duomo 1 bollard

A decorative bollard with a symmetrical light distribution with options of energy saving LED, compact fluorescent, metal halide and high pressure sodium lamps. Developed to compliment the Duomo range of pillar light, post top and wall light luminaires. Designed for various applications including – entrances, gardens, precincts and pathways.

Extruded aluminum column and low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and opal glass diffuser. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear.

Physical Data

Length: 6.3"

Height: 40.98"/41.77"

Weight: 20.5 lbs

Lamp

☐ HPS-ED17 50w 

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V
☐ 277V
☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL _____
☐ 06-Bronze - RAL 6014



Top Style

 ☐ 1 - Dome
 ☐ 2 - Flat



Mounting Accessories



☐ Anchor Bolt Kit
☐ Specify Custom Height _____ ft

Light Shields

 ☐ Asymmetrical 180° emission
 ☐ Asymmetrical 90° emission

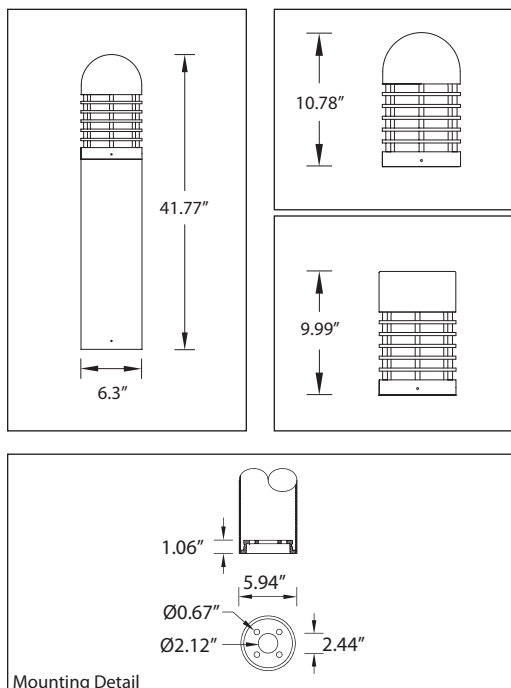

Ordering Example : UDU - 10185 - HPS - 50w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.