

IP65 : Suitable for Wet Locations

IK07 : Impact Resistant (Vandal Resistant)



## UEC-40266

### Eco recessed location light

A range of rectangular and square wall recessed luminaires, with a glare free cut-off reflector system. Suitable for pathways and ramps. The spread lens provides a wide beam spread evenly illuminating up to 8 m./ 26ft of a pathway . Low copper content die-cast aluminum housing with a high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and toughened linear spread lens. Double cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum cut-off reflector. This fixture is suitable for concrete pour applications.

#### Physical Data

Length: 12.76"  
Height: 10.98"  
Weight: 13.2 lbs

#### Lamp

☐ HPS-ED17 50w 

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)


#### Voltage (Please Specify)

☐ 120V  
☐ 277V  
☐ Other \_\_\_\_\_





#### Options

##### Color (Please Specify)

☐ 01-Black - RAL 9011 ☐ 02- Dark Grey - RAL 7043  
☐ 03-White - RAL 9003 ☐ 04 - Metallic Silver - RAL 9006  
☐ 05-Matt Silver - RAL 9006 ☐ 07- Custom - RAL \_\_\_\_\_  
☐ 06-Bronze - RAL 6014



☐ Surface Mounting Box Enclosure

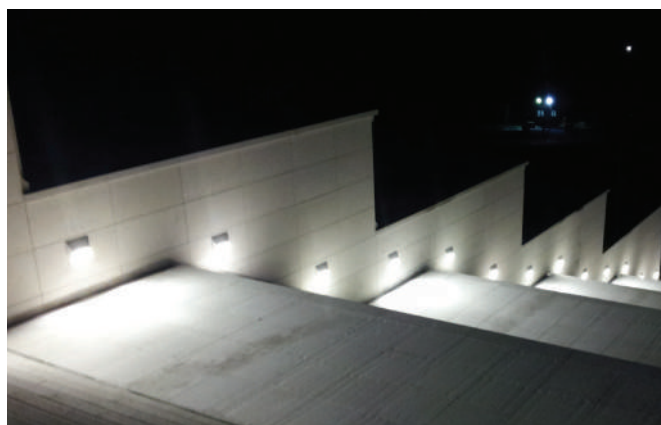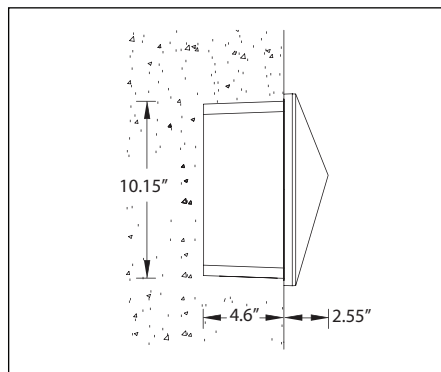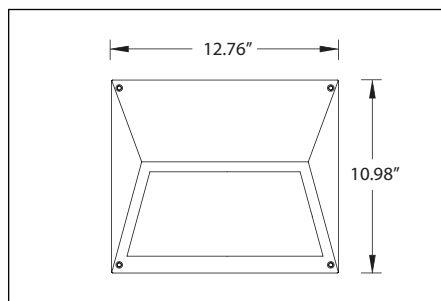

Ordering Example : UEC - 40266 - HPS-50w - 120v - Options

PROJECT: \_\_\_\_\_ DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ NOTE: \_\_\_\_\_

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.  
Due to the continual improvements in LED technology data and components may change without notice.