


LUMINAIRE SPECIFICATION

Tel: 503-645-0500 7144 NW Progress Ct

Fax: 503-645-8100 Hillsboro, Oregon 97124 www.ligmanlightingusa.com

IP55: Suitable for Wet Locations IK07: Impact Resistant (Vandal Resistant)



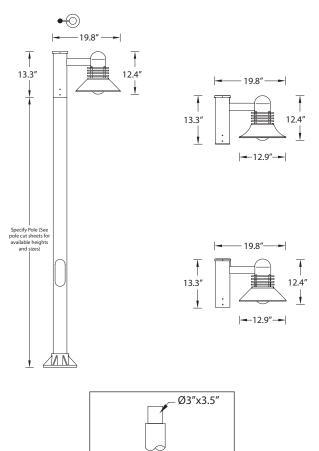

UDU-20011

Duomo single small shade post top

A post top luminaire with a small and medium size shade decorative lantern and symmetrical light distribution. It uses energy saving LED, compact fluorescent lamps as well as metal halide and high pressure sodium lamps. Developed to compliment the Duomo wall light, Duomo bollard and Duomo pillar light. Designed for lighting car parks, footpaths, pedestrian areas, precincts, parks, gardens and building perimeters. Low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and opal glass diffuser. Housing is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Integral electronic control gear.

Physical Data Length: 19.8" Height: 13.3" Weight: 43.2 lbs Lamp □ CFQ 13w •== (For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory) Voltage (Please Specify) □ 120V □ 277V □ Other Options (Please Specify) Color (Please Specify) □ 01-Black - RAL 9011 □ 02- Dark Grey - RAL 7043 □ 03-White - RAL 9003 □ 04 - Metallic Silver - RAL 9006 □ 05-Matt Silver - RAL 9006 □ 07- Custom - RAL □ 06-Bronze - RAL 6014 01 Shade Style □ (2) Straight Shade □ (1) Swept Shade □ DS- Dark Sky Compliant ☐ HGT - Specify Pole Height _ ☐ Single Banner Arm □ Double Banner Arm

Ordering Example: UDU - 20011 - CFQ - 13w - 120v - Options

Standard Tenon Size



PROJECT: DATE: _

QUANTITY: NOTE:

