

IP55 : Suitable for Wet Locations

IK07 : Impact Resistant (Vandal Resistant)

UDU-20112

Duomo double medium shade post top

A post top luminaire with a small and medium size shade decorative lantern and symmetrical light distribution. It uses energy saving LED, compact fluorescent lamps as well as metal halide and high pressure sodium lamps. Developed to compliment the Duomo wall light, Duomo bollard and Duomo pillar light. Designed for lighting car parks, footpaths, pedestrian areas, precincts, parks, gardens and building perimeters. Low copper content die cast housing with high corrosion resistance. Stainless steel screws. Durable silicone rubber gasket and opal glass diffuser. Housing is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Integral electronic control gear.

Physical Data

Length: 48.6"

Height: 16.2"

Weight: 68.5 lbs

Lamp

☐ CFQ 2x26w/CFTR 2x32/42w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

☐ 120V

☐ 277V

☐ Other _____

Options (Please Specify)

Color (Please Specify)

☐ 01-Black - RAL 9011

☐ 03-White - RAL 9003

☐ 05-Matt Silver - RAL 9006

☐ 06-Bronze - RAL 6014

☐ 02- Dark Grey - RAL 7043

☐ 04- Metallic Silver - RAL 9006

☐ 07- Custom - RAL _____



Shade Style

☐ (1) Swept Shade

☐ (2) Straight Shade

Top Style

☐ (1) Dome

☐ (2) Cone Top

☐ DS- Dark Sky Compliant






☐ Single Banner Arm



☐ Double Banner Arm

☐ HGT - Specify Pole Height _____ ft

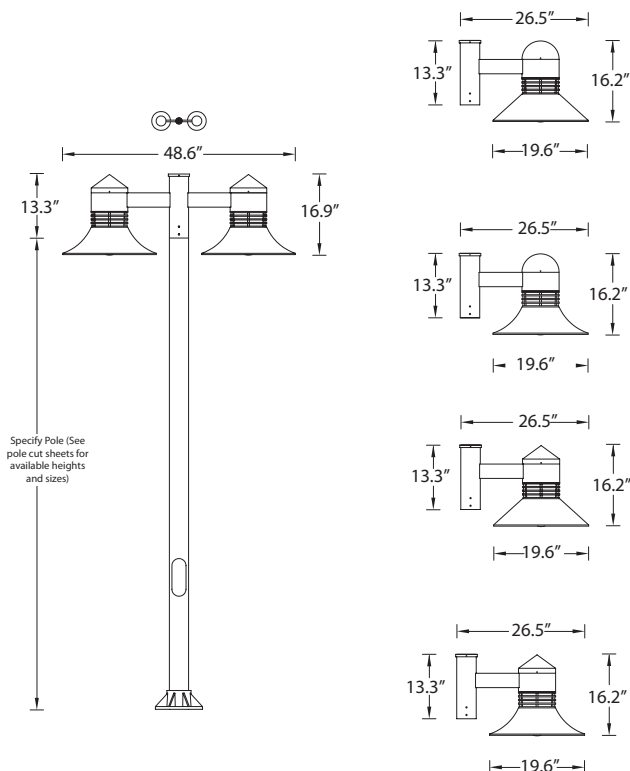

Ordering Example : UDU - 20112 - CFQ - 2x26w - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.