
APD-RSA-4012-6.5'-4.0" DIA .125"-WOODLAND Round Straight Aluminum Pole





APD-RSA-4012-6.5'-4.0" DIA .125"-WOODLAND

Round Straight Aluminum Pole

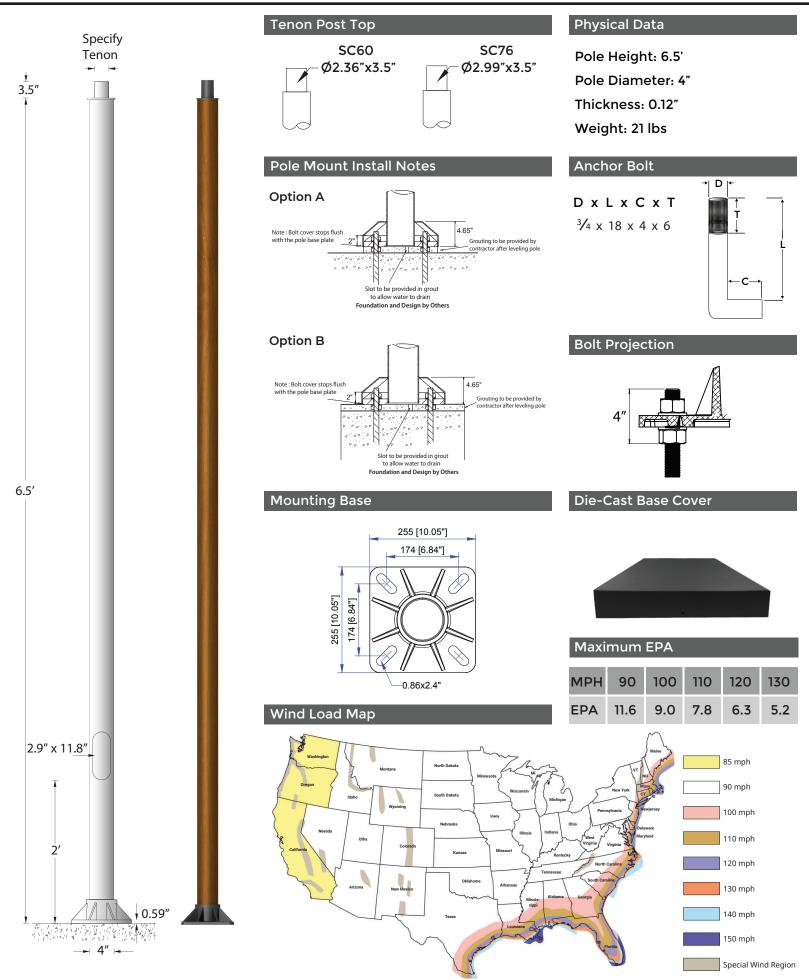

PROJECT						DATE	
QUANTITY	′	TYPE	NOT	Е			
ORDERING EX	AMPLE A	PD-RSA-401	2-6.5'-4.0" DIA	-"125. ۵	SC60-02-Option	ons	
TENON SC60 - 2.36" x 3.5" Tenon SC76 - 2.99" x 3.5" Tenon	FINISH DF - DOUGLAS FIR CW - CHERRY WOO NW - NATIONAL W	DD FINISH	on aluminum is both gorged Ligman utilizes innovations i residential applications. The Non-hazardous powder pair A printed film transfer is vac oven. The oven transforms t removed and provides a viving Faux timber on aluminum crappearance of timber. Busin saves on labour and transpotation of the process operates unde Association (AAMA) and ackrathis product is available in (Contact factory for more de This environmentally consumprise Social Responsibilises and positions.	us and adapt. In faux timber process begin t is applied by uum sealed to be ink into diff d timber look eates a realist esses and corrtation costs. In uminum from an or creates a singular precise standowledged by a wide array of tails) It cious process to be into the company pations to our atoms.	on aluminum technology to cre is by pre-treating raw aluminum relectrostatic guns to create a 2 the surface for a complete ther ferent forms within the paint lay on the aluminum. cic and durable solution to tradit tractors will appreciate the light weather, corrosion, humidity, li uperior, high-definition coloratic dards, garnering certificates fro the European Laboratory and R if stunning colors and patterns t saves extensive quantities of sand natural resources are dialogous, we strive to always minim clients. Ligman's products are d	tate stunning materials for both on to develop light layers of amorp. 5 mils layer of coating. Tromo print and then transferred in the before it becomes solid. Finally strength of timber finish that does not fade compared that does not fade compared the the American Architectural Malesearch Organization.	commercial and phous oxide. Into a customized ly, the film is ining the stunning on aluminum that to conventional anufactures part of our well as offer truly
			dozens of specific different was columns, bollards, wall and fading and resistant to design the columns.	vood types to loodlights and legradation b	match any landscape design, bu d critically that the specified finis	anges means not only can we off ut we can do this on a whole fam sh is future proof; guaranteed ag ast a natural resource such as cut remely limited in applications.	ily of matching painst any cracking
ADDITIONAL	ODTIONS	CONCLUT	FACTORY FOR		INC		
ADDITIONAL	OPTIONS .	- CONSULT	FACTORTFOR	RPRIC	ING		
A20181 - Single Banner Arm A20281 - Double Banner Arm GFCI - GFCI Box	3.3"	<u>ø</u> 4"	61.1"	Y			
A20181 Single Banne			20281 Banner Arm	П	GFCI GFCI Box		

Not to scale template:

This drawing is being furnished for reference dimensions only and cannot be used as a template to set anchor bolts. Since it is "not to scale" Ligman accepts no responsibility for its intended use. Refer to site plans and specification before installing any anchor bolts.

Banner arms are designed with a safety break-away at the clamp with an internal safety wire that prevents the arm from falling to the ground.

* Contact Ligman Lighting USA for bolt template prior to pouring anchor bolts.