

MELBOURNE 4 (UMEL-60033)**Product description**

8.5in Diameter | Discreet | flush in-ground outdoor Light
 120-277VAC Input Voltage
 Up to 2139 lm output– Adjustable output for Compliance
 and Energy Codes
 CRI80 2700K, CRI80 3000K, CRI80 3500K, CRI80 4000K
 Color temperature Options
 Includes 0-10V dimmable integrated and programmable
 driver
 Very Narrow Optical Pattern

**Luminaire Structure**

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> - Die-cast stainless steel in grade 316 - Body is pre-treated before powder coating ensuring high corrosion resistance - Front ring in grade 316 stainless steel - Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063 - Single cable entry, through wiring upon request - One cable gland supplied with 2.5ft outdoor cable | <ul style="list-style-type: none"> - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket - High-efficiency PMMA lens - Clear, .59" thick, toughened glass - Recessing box in high-density polyethylene is included - Suitable for drive-over with a maximum load of 11,000LBS | <ul style="list-style-type: none"> - Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph - Load is transferred by the housing to the foundation - One glass suction cup for easy installation is included in each item list on the order - The distance between the luminaire and the illuminated surface should be at least 1.6ft |
|---|---|--|

Optic



VN

Product colour

00 - Stainless Steel

MELBOURNE 4 (UMEL-60033)**Technical information**

Material	Stainless Steel	Input voltage	120-277V 50/60Hz	Dimming type	On/Off 0-10v Dimming 1%-100% Dimming
Light source	3 LED	Optic	VN	Product colors	Stainless Steel
Power	28 W	Optic value	8°	Weight	24.25lbs
Lumen	2033 - 2139 lm	CCT / CRI	2700K CRI80, 3000K CRI80, 3500K CRI80, 4000K CRI80	Operating temperature	-22 °f to 185 °f
Efficacy	73 - 76 lm/W	Bug	B0-U5-G0	Cable	Supplied with 2.5ft of Outdoor Submersible Cable
Driver option	Integral control gear	ULR	100	Through wiring	Single cable entry, through wiring upon request
Driver	Constant current (CC)	ULOR	100		

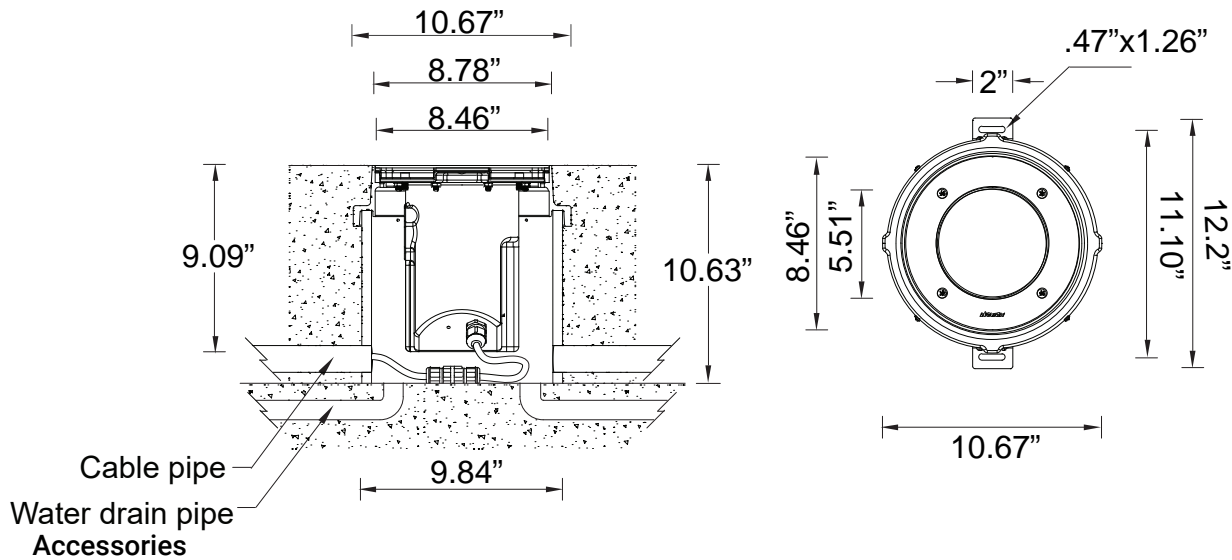

Honeycomb louvre
A62421



Anti slip glass
A62112



Glass suction cup
A614491

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.