


MELBOURNE 5 (UMEL-60041)**Product description**

11.4in Diameter | Discreet | flush in-ground outdoor Light
 120-277VAC Input Voltage
 Up to 7015lm output– Adjustable output for Compliance and Energy Codes
 CRI80 2700K, CRI80 3000K, CRI80 3500K, CRI80 4000K
 Color temperature Options
 Includes 0-10V dimmable integrated and programmable driver
 4 optics configurations available

**Luminaire Structure**

- Die-cast stainless steel in grade 316
- Body is pre-treated before powder coating ensuring high corrosion resistance
- Front ring in grade 316 stainless steel
- Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063
- Single cable entry, through wiring upon request
- One cable gland supplied with 2.5ft outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear, .59" thick, toughened glass
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 11,000LBS
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph
- Load is transferred by the housing to the foundation
- One glass suction cup for easy installation is included in each item list on the order
- The distance between the luminaire and the illuminated surface should be at least 1.6ft

Optic**Product color**

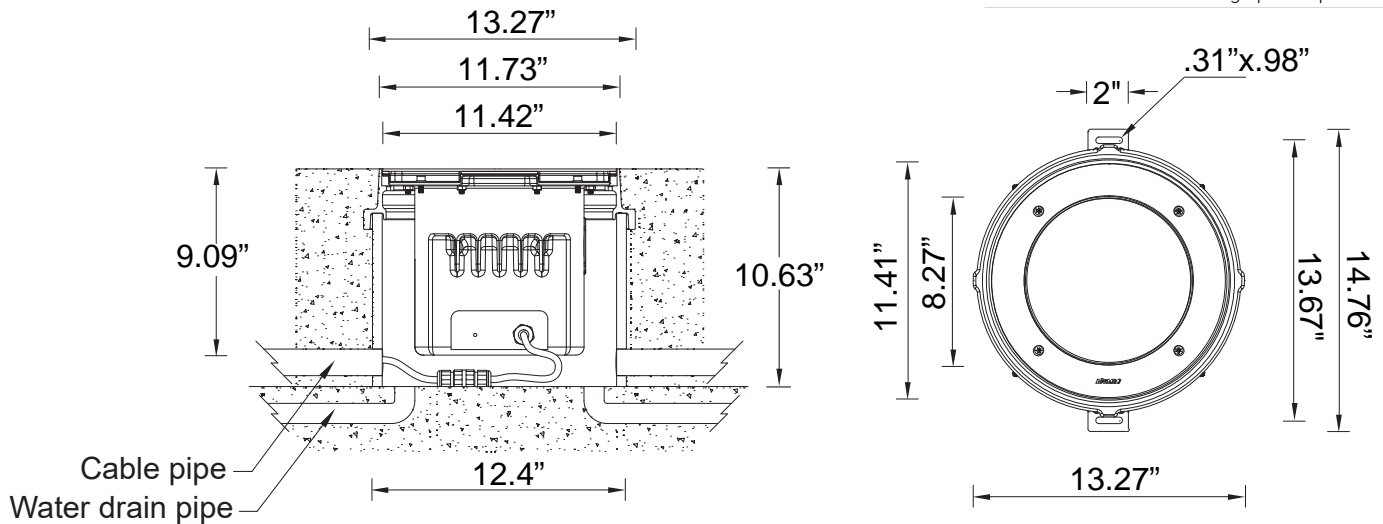

00 - Stainless Steel

MELBOURNE 5 (UMEL-60041)**Technical information**

Material	Stainless Steel
Light source	6 COB
Power	50 W
Lumen	5580 - 7015 lm
Efficacy	112 - 140 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	120-277V 50/60Hz
Optic	M, W, E, AS
Optic value	24°, 45°, 51°x33°, 53°x42°
CCT / CRI	2700K CRI80, 3000K CRI80, 3500K CRI80, 4000K CRI80
Bug	B0-U5-G0
ULR	100
ULOR	100

Dimming type	On/Off 0-10v Dimming 1%-100% Dimming
Weight	37.5lbs
Product colors	Stainless Steel
Operating temperature	-22 °f to 185 °f
Cable	Supplied with 2.5ft of Outdoor Submersible Cable
Through wiring	Single cable entry, through wiring upon request

**Accessories**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.