


MELBOURNE 5 (UMEL-60042)**Product description**

11.4" Diameter | Discreet | Flush In-Ground
Outdoor Light
120-277v Input Voltage
Up to 2,008 Lumen Output
RGBW – Unlimited Possibilities of Color
Scenes / Color Transitions through a DMX
Controller (Stick-DE3 Sold Separately)
Narrow or Wide Optical Pattern

**Luminaire Structure**

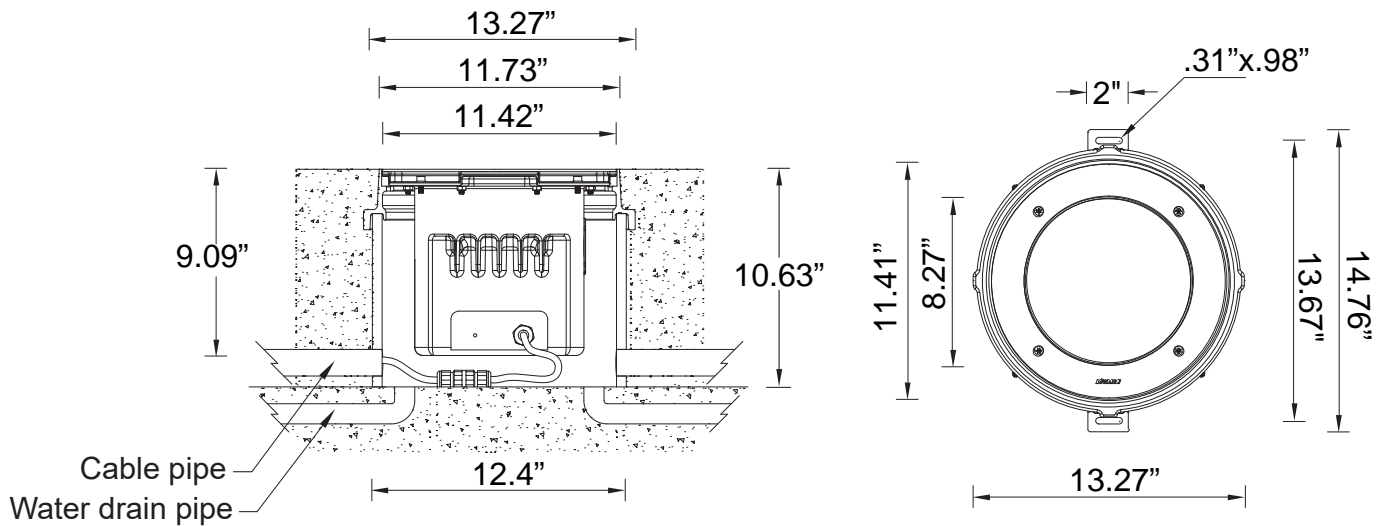

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> - Die-cast stainless steel in grade 316 - Body is pre-treated before powder coating ensuring high corrosion resistance - Front ring in grade 316 stainless steel - Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063 - Single cable entry, through wiring upon request - One cable gland supplied with 2.5ft outdoor cable | <ul style="list-style-type: none"> - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket - High-efficiency PMMA lens - Clear, .59" thick, toughened glass - Recessing box in high-density polyethylene is included - Suitable for drive-over with a maximum load of 11,000LBS | <ul style="list-style-type: none"> - Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph - Load is transferred by the housing to the foundation - One glass suction cup for easy installation is included in each item list on the order - The distance between the luminaire and the illuminated surface should be at least 1.6ft |
|---|---|--|

Optic**Product color**

00 - Stainless Steel

MELBOURNE 5 (UMEL-60042)**Technical information**

Material	Stainless Steel	Input voltage	120-277V 50/60Hz	Dimming type	DMX, DMX/RDM
Light source	6 LED	Optic	N, W	Product colors	Stainless Steel
Power	45 W	Optic value	12°, 37°	Weight	37.5lbs
Lumen	1573 - 2008 lm	CCT / CRI	RGBW30, RGBW40	Cable	Supplied with 2.5ft of Outdoor Submersible Cable
Efficacy	35 - 45 lm/W	Bug	B0-U5-G0	Through wiring	Single cable entry, through wiring upon request
Driver option	Integral control gear	ULR	100		
Driver	Constant current (CC)	ULOR	100		

**Accessories**

Honeycomb louvre
A62521



Anti slip glass
A62212



Glass suction cup
A614491

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.