

**MELBOURNE 6** (UMEL-60053)**Product description**

8.5" Diameter | Discreet | Flush In-Ground Outdoor Light  
 120-277v Input voltage  
 Up to 736 Lumen Output  
 Includes Integral 0-10v Programmable Dimming Driver  
 CRI80 2700k, CRI80 3000k, CRI80 3500k, CRI80 4000k  
 Externally adjustable tilt up to 25° along with 360° rotation  
 Very Narrow Optical Pattern

**Luminaire Structure**

- |   |   |  |
|---|---|--|
| <ul style="list-style-type: none"> <li>- Die-cast stainless steel in grade 316</li> <li>- Body is pre-treated before powder coating ensuring high corrosion resistance</li> <li>- Front ring in grade 316 stainless steel</li> <li>- Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063</li> <li>- Single cable entry, through wiring upon request</li> <li>- One cable gland supplied with 2.5ft outdoor cable</li> </ul> | <ul style="list-style-type: none"> <li>- Stainless steel fasteners in grade 316</li> <li>- Durable silicone rubber gasket</li> <li>- High-efficiency PMMA lens</li> <li>- Clear, .59" thick, toughened glass</li> <li>- Recessing box in high-density polyethylene is included</li> <li>- Suitable for drive-over with a maximum load of 11,000LBS</li> </ul> | <ul style="list-style-type: none"> <li>- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph</li> <li>- Load is transferred by the housing to the foundation</li> <li>- One glass suction cup for easy installation is included in each item list on the order</li> <li>- The distance between the luminaire and the illuminated surface should be at least 1.6ft</li> </ul> |
|---|---|--|

**Optic**




VN

**Product color**

00 - Stainless Steel

**MELBOURNE 6 (UMEL-60053)****Technical information**

<b>Material</b>	Stainless Steel	<b>Input voltage</b>	120-277V 50/60Hz	<b>Dimming type</b>	On/Off 0-10v Dimming 1%-100% Dimming
<b>Light source</b>	1 LED	<b>Optic</b>	VN	<b>Product colors</b>	Stainless Steel
<b>Power</b>	11 W	<b>Optic value</b>	8°	<b>Weight</b>	24.25lbs
<b>Lumen</b>	699 - 736 lm	<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 3500K CRI80, 4000K CRI80	<b>Operating temperature</b>	-22 °f to 185 °f
<b>Efficacy</b>	64 - 67 lm/W	<b>Bug</b>	B0-U4-G0	<b>Cable</b>	Supplied with 2.5ft of Outdoor Submersible Cable
<b>Driver option</b>	Integral control gear	<b>ULR</b>	100	<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Driver</b>	Constant current (CC)	<b>ULOR</b>	100		

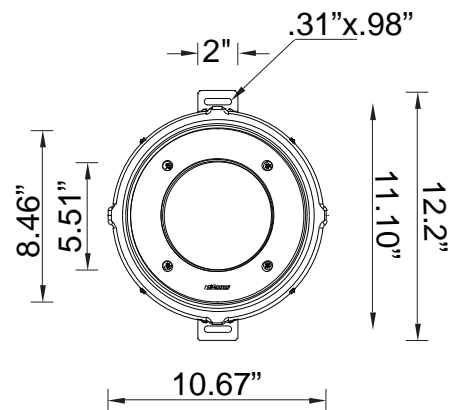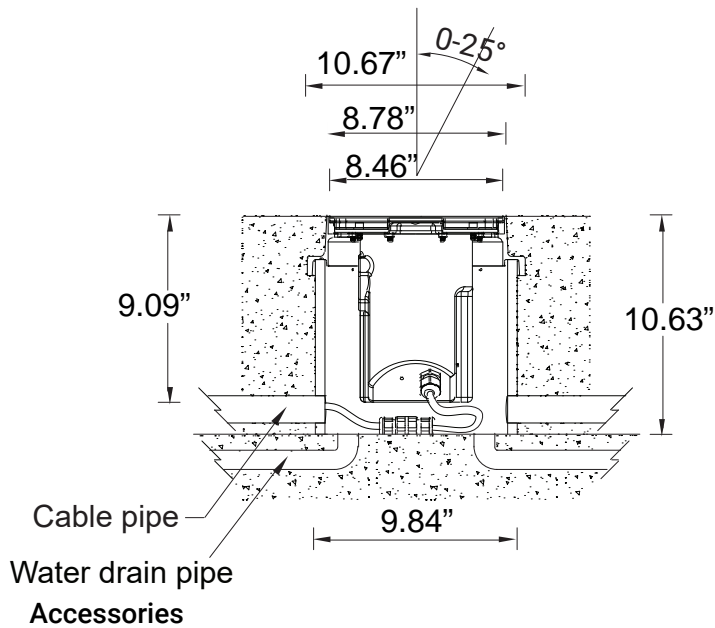

Honeycomb louvre  
**A62421**



Anti slip glass  
**A62112**



Glass suction cup  
**A614491**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.