

MELBOURNE 7 (UMEL-60061)**Product description**

11.4" Diameter | Discreet | Flush In-Ground Outdoor Light
 120-277v Input Voltage
 4602 Lumen Output – Adjustable output for Compliance and Energy Codes
 CRI80 2700k, CRI80 3000k, CRI80 3500k, CRI80 4000k
 Includes Integral 0-10v Programmable Dimming Driver
 Externally adjustable tilt up to 25° and 360° rotation
 3 optic configurations available

**Luminaire Structure**

- Die-cast stainless steel in grade 316
- Body is pre-treated before powder coating ensuring high corrosion resistance
- Front ring in grade 316 stainless steel
- Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063
- Single cable entry, through wiring upon request
- One cable gland supplied with 2.5ft outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear, .59" thick, toughened glass
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 11,000LBS
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph
- Load is transferred by the housing to the foundation
- One glass suction cup for easy installation is included in each item list on the order
- The distance between the luminaire and the illuminated surface should be at least 1.6ft

Optic**Product color**

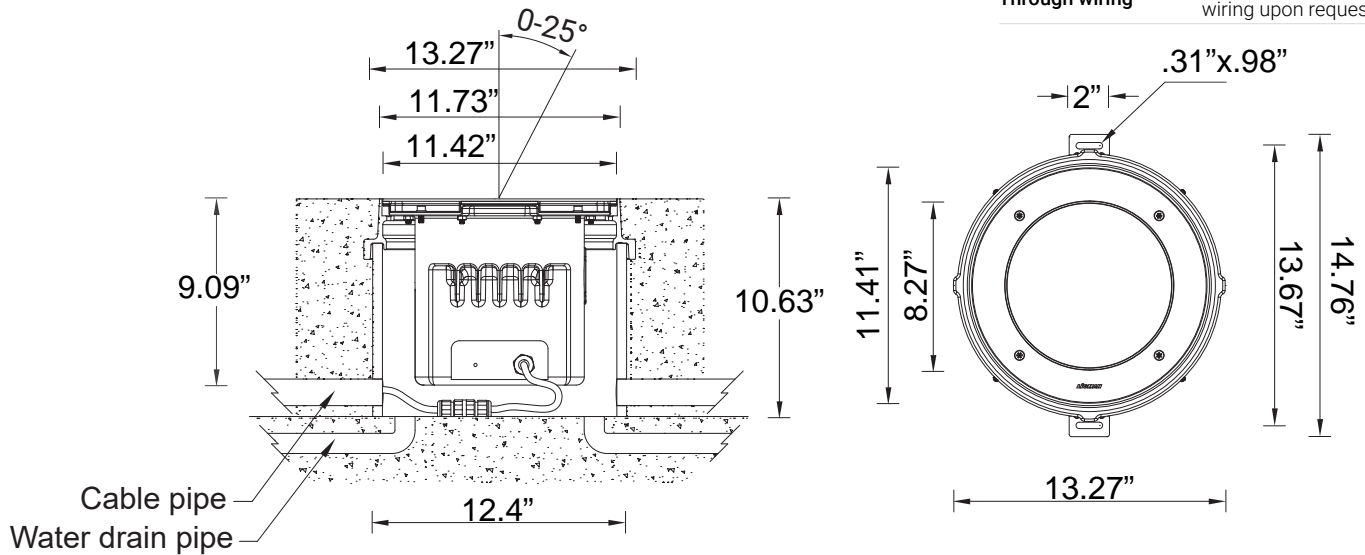

00 - Stainless Steel

MELBOURNE 7 (UMEL-60061)**Technical information**

Material	Stainless Steel
Light source	3 COB
Power	33 W
Lumen	3664 - 4602 lm
Efficacy	111 - 139 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	120-277V 50/60Hz
Optic	M, W, E
Optic value	24°, 47°, 51°x33°
CCT / CRI	2700K CRI80, 3000K CRI80, 3500K CRI80, 4000K CRI80
Bug	B0-U5-G0
ULR	100
ULOR	100

Dimming type	On/Off 0-10v Dimming 1%-100% Dimming
Product colors	Stainless Steel
Weight	37.5lbs
Operating temperature	-22 °f to 185 °f
Cable	Supplied with 2.5ft of Outdoor Submersible Cable
Through wiring	Single cable entry, through wiring upon request

**Accessories**

Honeycomb louvre
A62521



Anti slip glass
A62212



Glass suction cup
A614491

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.