

MELBOURNE 7 (UMEL-60063)**Product description**

11.4" Diameter | Discreet | Flush In-Ground Outdoor Light
 120-277v Input Voltage
 2041 Lumen Output – Adjustable output for Compliance and Energy Codes
 CRI80 2700k, CRI80 3000k, CRI80 3500k, CRI80 4000k
 Includes Integral 0-10v Programmable Dimming Driver
 Externally adjustable tilt up to 25° and 360° rotation
 Very Narrow Optical Pattern

**Luminaire Structure**

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> - Die-cast stainless steel in grade 316 - Body is pre-treated before powder coating ensuring high corrosion resistance - Front ring in grade 316 stainless steel - Externally adjustable: Tilt 25°, Rotation 360° for UMEL-60051, UMEL-60052, UMEL-60053, UMEL-60061, UMEL-60062, UMEL-60063 - Single cable entry, through wiring upon request - One cable gland supplied with 2.5ft outdoor cable | <ul style="list-style-type: none"> - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket - High-efficiency PMMA lens - Clear, .59" thick, toughened glass - Recessing box in high-density polyethylene is included - Suitable for drive-over with a maximum load of 11,000LBS | <ul style="list-style-type: none"> - Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 31 mph - Load is transferred by the housing to the foundation - One glass suction cup for easy installation is included in each item list on the order - The distance between the luminaire and the illuminated surface should be at least 1.6ft |
|---|---|--|

Optic

VN

Product color

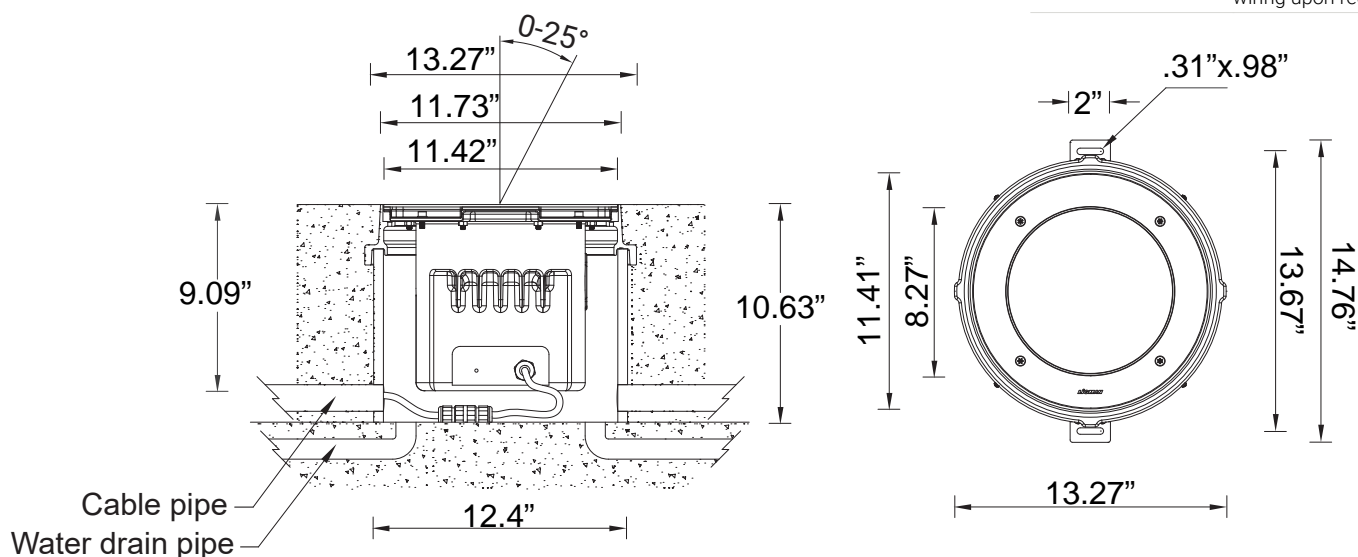

00 - Stainless Steel

MELBOURNE 7 (UMEL-60063)**Technical information**

Material	Stainless Steel
Light source	3 LED
Power	28 W
Lumen	1939 - 2041 lm
Efficacy	69 - 73 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	120-277V 50/60Hz
Optic	VN
Optic value	8°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U5-G0
ULR	100
ULOR	100

Dimming type	On/Off 0-10v Dimming 1%-100% Dimming
Product colors	Stainless Steel
Weight	37.5lbs
Operating temperature	-22 °f to 185 °f
Cable	Supplied with 2.5ft of Outdoor Submersible Cable
Through wiring	Single cable entry, through wiring upon request

**Accessories**

Honeycomb louvre
A62521



Anti slip glass
A62212



Glass suction cup
A614491

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.