## Atlantic 4 Medium Shade Post Top





Ø2.9"x3.5"

**Tenon Detail** 


2x41w COB 2x2632 Lumens

IP55 Suitable for wet locations

IK04 oact Resistant

Weight - 70 lbs

POLE NOT INCLUDED



## Construction

Aluminum. Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength , clean detailed product lines and excellent heat dissipation.

### Pre paint

deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

### Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets.

Maintains the gaskets exact profile and seal over years of use and compression.

### Thermal management

I M6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000

<u>Surge Suppression</u> Standard 10kv surge suppressor provided with all fixtures.

## BUG Rating B1 - U3 - G1

Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums

### Inspired by Nature Finishes

The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost undistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching.

The Coating Process
After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal description.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains.

Wood grain coating can create beautiful wood-looking products of any sort. There are over 300 combinations of designs currently in use. Wood grains can be made with different colors, designs, etc.

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

- Resistance to salt-acid room, accelerated aging
- Bolling water, lime and condensed water resistant
   Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch
   Super durable (UV restant)
- TGIC free (non-toxic)

Provided Hardware is Marine grade 316 Stainless steel.

### Anti Seize Screw Holes

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

## Opal Borosilicate Glass Lens

Provided with opal borosilicate impact resistant glass.

Precise optic design provides exceptional light control and precise distribution of light. LED CRI > 80

<u>Lumen - Maintenance Life</u> L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

Classic urban neighborhood post-top luminaire family. Timeless lines coupled with unparalleled build quality, flexibility and performance.

A post top luminaire with a small and medium size shade decorative lantern and symmetrical light distribution. Developed to complement the Atlantic wall light, Atlantic bollard and Atlantic pillar light. Designed for lighting car parks, footpaths, pedestrian areas, precincts, parks, gardens and building perimeters.


Color temperature 2700K, 3000K, 3500K and 4000K, LED CRI >80 and life time 50,000 Hours.

This luminaire is provided prewired with power cord to the handhole to simplify installation. Marine grade 316 stainless steel fasteners. Durable memory retentive silicone rubber gasket and opal borosilicate glass diffuser.

## **Additional Options (Consult Factory For Pricing)**




**Root Mount Kit** 

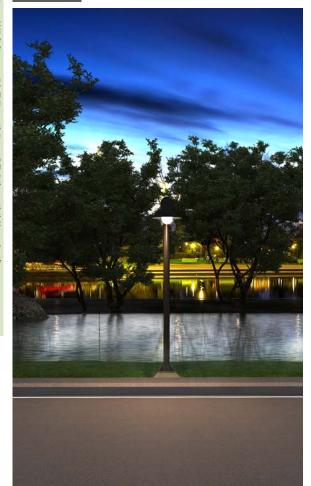

## **UAA-20764**

## Atlantic 4 Medium Shade Post Top



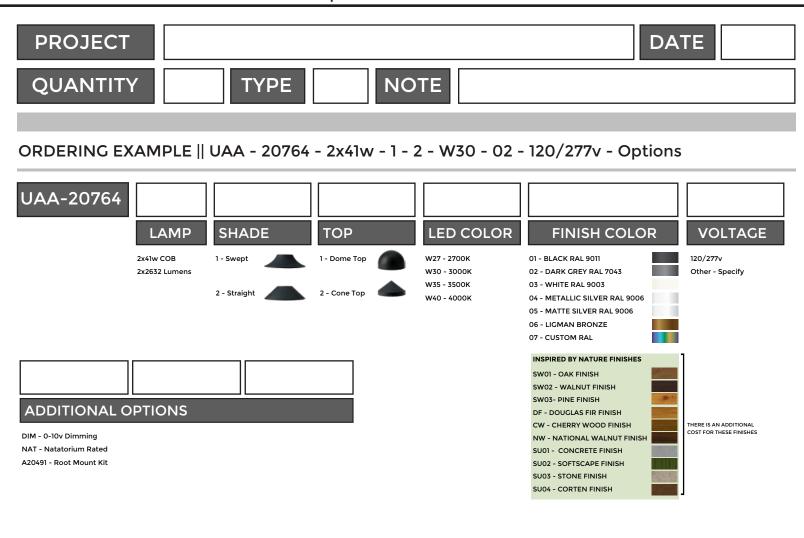

## **More Custom Finishes Available Upon Request**

Consult factory for pricing and lead times







# **Atlantic Product Family**



- UAA-10077-41/29w-1454/1028Im [Ø6.3"- 30.3"/29.6"]
- UAA-10087-41w-14541028Im [Ø6.3"- 19.6"/18.8"]
- UAA-70077-41w-1454/1028Im [Ø6.3"- 42.4"/41.6"]



- Atlantic 2
- UAA-10097-41/29w-1602/1133Im [Ø7.3"- 32.6"/31.3"]
   UAA-10107-41/29w-1602/1133Im [Ø7.3"- 44.6"/43.3"]
- UAA-70087-41w-1602lm [Ø7.3"- 21.9"/20.6"]



• UAA-20046-29w-1105lm



• UAA-20076-41w-2632lm



• UAA-20166-41w-2632lm



Atlantic 7

• UAA-30146-29w-1105lm



Atlantic 8

• UAA-30156-41w-2632lm



Atlantic 9



Atlantic 13

• UAA-95016-41w-2632lm