


# ROBUST

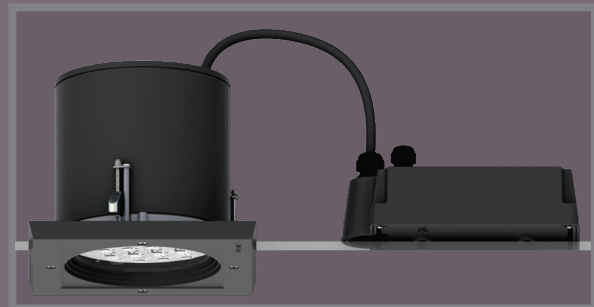

IP65 RATED FROM ABOVE AND BELOW

IP65 RATED DRIVER ENCLOSURE

STAINLESS STEEL | ALUMINUM FRAME

SQUARE OR ROUND STYLES

TYPE II, III & IV DISTRIBUTIONS

2700 | 3000 | 4000 KELVIN

TYPE II

TYPE III

TYPE IV

