

For Installation of Lighttalk 10 Recessed Wall Light RGBW.  
Model. ULA-40013 and ULA-40014

**PRODUCT DRAWING (DIMENSIONS)**

ULA-40013 dimensions: 1'-9.43" (length), 2'-1.81" (length), 3.35" (height), 2.56" (height), 1.46" (height), 3.35" (height), 0.12" (height), 3.55" (height).

ULA-40014 dimensions: 1'-7.27" (length), 4'-1.23" (length), 3.35" (height), 2.56" (height), 1.46" (height), 3.35" (height), 0.12" (height), 3.55" (height).

**MOUNTING DETAIL**

L2 (LENGTH CUT) L1 (LENGTH CUT)

MODEL NO.	DIMENSION	
	L1(mm.)	L2(mm.)
ULA-40013	70 (2.76")	650 (25.6")
ULA-40014	70 (2.76")	1245 (49")

①

MAIN LINE  
LOOP LINE TO NEXT FIXTURE

②

Diagram showing the connection of the main line and loop line to the fixture.

③

Diagram showing the connection of the main line and loop line to the fixture, with a color code for the 5-wire cable.

**DETAIL WIRE COLORS FOR 5-WIRE CABLE**

- GREEN.....GROUND
- BLACK.....120/277 HOT
- WHITE.....NEUTRAL
- PURPLE.....DMX +
- PINK.....DMX -

④



Diagram showing the final installation of the fixture into the wall.

**Notice to installer :**  
**WIRING INSTRUCTIONS Warning :** RISK OF FIRE AND ELECTRICAL SHOCK. : FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY>FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL CODE SPECIFICATIONS. DISCONNECT POWER BEFORE SERVICING.

Ligman Lighting USA

7144 NE Progress Court, Hillsboro  
Oregon, 97124, USA  
Tel : 503 645 0500 | Fax : 503 645 8100

5

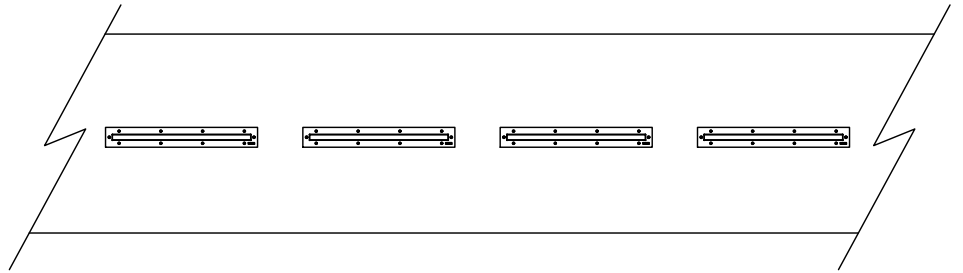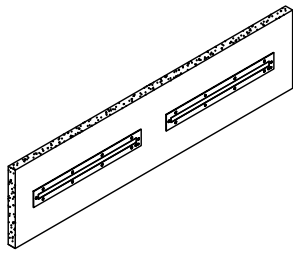

6

# WIRING DIAGRAM DMX SYSTEM

TOTAL LENGTH PER OUT DOES NOT EXCEED 300m. [984ft.]

120 - 277 Vac. MAX: 32 DEVICES PER OUTPUT (MORE USING BOOSTERS OR SPLITTERS)

