

IP65 : Suitable for Wet Locations

IK10 : Impact Resistant (Vandal Resistant)

ULH-10543

Lightsoft square bollard

The innovative reflector technology of the Lightsoft bollard guarantees a high degree of efficiency and optimal visual comfort while fulfilling the dark sky criteria. Lightsoft has been developed to have excellent controlled downward light eliminating any glare. It has three light shield accessories with different light distributions. The Lightsoft is available in a cylindrical or square shape design with two different heights. Designed for lighting of entrances and residential areas by providing wide spread illumination on driveways, pathways and squares.

Extruded aluminum body and low copper content die-cast aluminum housing. Stainless steel screws. Durable silicone rubber gasket and clear impact resistant UV stabilized polycarbonate lens. Single cable entry. Housing is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral ballast and anodized high purity aluminum reflector.

Physical Data

Length: 7.32"

Height: 39.49"

Weight: 25.5 lbs

Lamp

☐ T6 CMH 70w

(For More Lamp options including LED, please Consult the Catalogue, Website or Contact The Ligman Lighting Factory)

Voltage (Please Specify)

- ☐ 120V
☐ 277V
☐ Other _____

Options (Please Specify)

Color (Please Specify)

- ☐ 01-Black - RAL 9011
☐ 02- Dark Grey - RAL 7043
☐ 03-White - RAL 9003
☐ 04 - Metallic Silver - RAL 9006
☐ 05-Matt Silver - RAL 9006
☐ 06-Bronze - RAL 6014
☐ 07- Custom - RAL _____



Light Shields



☐ asymmetrical
180° emission




☐ asymmetrical
90° + 90° emission





☐ asymmetrical
180° emission + lightblade

Mounting Accessories



☐ Anchor Bolt Kit

☐ Specify Custom Height _____ ft

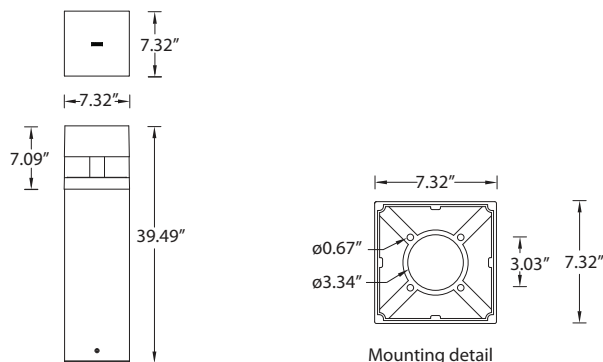

Ordering Example : ULH - 10543 - T6-CMH-70w - 120v

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
Due to the continual improvements in LED technology data and components may change without notice.